

## INSTALLATION SHEET

Thank you for using our led emergency exit sign light. It is recommended that This Exit sign LED emergency lamp are installed in the passageways of the residential building, Basement, Hallway, Manufactory, Warehouse, Hotel, Office, Government Buildings, Subway, School, Apartment Buildings, Railway Station, Metro Station, shopping mall, etc. Which can be used as emergency escape sign in the case of fire and prompt the direction of safe evacuation in the area where people are. These instructions should be read carefully & retained after installation for future reference & maintenance.

### INSTRUCTION

**Model: NA08-EL-35**

### MAIN FEATUERS:


- Recessed Design
- Two Side fitting for pictorial legends
- Intelligent automatic recharging function
- 3 hours emergency operation
- Led charge status display
- Easy installation



### PARAMETERS:

Input Voltage:	85-265V
Battery Type:	2.4V 800mAh
Dimension:	35*11.3*3.5cm
Emergency time:	180mins
Wattage:	3W
Emergency Output Power:	1W
IP grade:	IP30
Charging time:	24 hours
Warranty:	2years

### SIZE

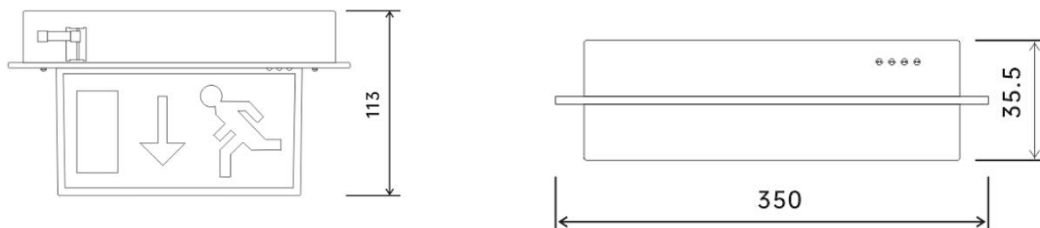

### Customized

Pattern Design	Available, Please send us your design artwork
LOGO Printing	Available on Packaging box, or sticker on the product
Packaging include	1pc*led emergency exit light
Packaging	20pcs per carton, carton size: 38*25.5*36cm carton weight: 8/9KG

### INSTALLATION:

Step1: Isolate mains power supply

Step2: Follow the wiring instructions below

L1 – Un-switched Live for Permanent Emergency Module Supply

N – Neutral

E – Earth (optional for continuity only)

L – Switched Live for Normal Operation (only connect for maintained use)

Step3: Open the mains power, Lights on the LED lamp switch on/off to control lights. Check the emergency function, Cut off the main supply, led lamp switch to emergency output immediately.

**INDICATOR:**

Green LED indicator is on that shows main power is on, when emergency function, green light is off;

Red LED indicator shows battery is on charging, When battery full charged, Red LED indicator off.

Yellow LED indicator: something wrong with battery or Emergency light.

**NOTICE:**

When using electrical equipment, basic safety precautions should always be followed including the following:

- Before commencing installation or servicing, turn off and isolate the circuit to be worked on by removing the fuse or switching the circuit breaker off at the distribution board.
- This product is suitable for connection to a 85-265Vac 50/60Hz supply.
- The emergency fitting is not suitable for use on a battery supply, trickle or intermittent re-charging circuit.
- The emergency fitting is not protected against supply voltage polarity reversal.
- The recharging device will recharge the battery normally after removal of a battery short-circuit.
- When cutting holes, drilling or screwing take care not to damage existing wiring or pipework.

**STORAGE:**

If the emergency light is not used for over 3 months, it should be connected to AC power for full charging and discharging (until LED lamp is completely off). Then keeping the emergency driver on main power for 24 hours and put it in dry ventilated place.



The Waste Electrical & Electronic Equipments regulations (WEEE) requires that products bearing this symbol must not be disposed of with household waste as they may contain substances harmful to the environment. The local authority can provide advice on recycling.