


1.2 Description of Nameplate

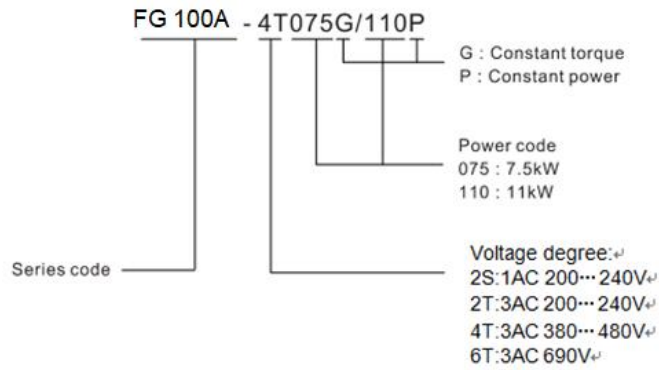

1.3 Selection Guide

Model No	Input voltage	Rated power (kW)	Rated output Current (A)
FG100A - 4T007G/011P	3-phase (380...480V)± 10%	0.75/1.1	2.5/3.0
FG100A - 4T011G/015P		1.1/1.5	3.0/3.7
FG100A - 4T015G/022P		1.5/2.2	3.7/5.0
FG100A - 4T022G/030P		2.2/3.0	5.0/7.5
FG100A - 4T030G/040P		3.0/4.0	7.5/9.0
FG100A - 4T040G/055P		4.0/5.5	9.0/13.0
FG100A - 4T055G/075P		5.5/7.5	13/17
FG100A - 4T075 G/110P		7.5/11	17/25
FG100A - 4T110G/150P		11/15	25/32
FG100A - 4T150G/185P		15/18.5	32/37
FG100A - 4T185G/220P		18.5/22	37/45
FG100A - 4T220G/300P		22/30	45/60
FG100A - 4T300G/370P		30/37	60/75
FG100A - 4T370G/450P		37/45	75/90
FG100A - 4T450G/550P		45/55	90/110
FG100A - 4T550G/750P		55/75	110/150
FG100A - 4T750G/900P		75/90	150/176
FG100A - 4T900G/1100P		90/110	176/210
FG100A - 4T1100G/1320P		110/132	210/253
FG100A - 4T1320G/1600P		132/160	253/300
FG100A - 4T1600G/1850P		160/185	300/340
FG100A - 4T1850G/2000P		185/200	340/380
FG100A - 4T2000G/2200P		200/220	380/420
FG100A - 4T2200G/2500P		220/250	420/470
FG100A - 4T2500G/2800P		250/280	470/520
FG100A - 4T2800G/3150P		280/315	520/600
FG100A - 4T3150G/3550P		315/355	600/640
FG100A - 4T3550G		355	640
FG100A - 4T4000G		400	690
FG100A - 4T4500G		450	830
FG100A - 4T5000G		500	860
FG100A - 4T5600G		560	950

FG100A -6T110G	3-phase 690V ± 10%	11	15
FG100A -6T 150G		15	18
FG100A -6T 185G		18.5	22
FG100A -6T 220G		22	28
FG100A -6T300G		30	35
FG100A -6T 370G		37	45
FG100A -6T 450G		45	52
FG100A -6T 550G		55	63
FG100A -6T 750G		75	86
FG100A -6T 900G		90	97
FG100A -6T 1100G		110	121
FG100A -6T 1320G		132	150
FG100A -6T 1600G		160	175
FG100A -6T 1850G		185	200
FG100A -6T 2000G		200	218
FG100A -6T 2200G		220	240
FG100A -6T 2500G		250	270
FG100A -6T 2800G		280	330
FG100A -6T 3150G		315	345
FG100A -6T 3550G		355	370
FG100A -6T 4000G		400	430
FG100A -6T 4500G		450	480
FG100A -6T 5000G		500	520
FG100A -6T 5600G		560	570
FG100A -6T 6000G		600	600
FG100A -6T 6300G		630	680
FG100A -6T 7000G	700	750	
FG100A -6T 8000G	800	860	
FG100A -6T 10000G	1000	1080	