


H.265 5.0MP CCTV Video Surveillance IR Dome IP HD Camera



Features

- * Hisilicon high-performance DSP
- * High quality progressive scanning CMOS
- * H.265/H.264 High profile
- * Support dual stream, support mobile phone
- * Support power supply DC12V/POE
- * Standard ONVIF Protocol, support multi network protocols
- * Metal case, Waterproof IP66

Dimension

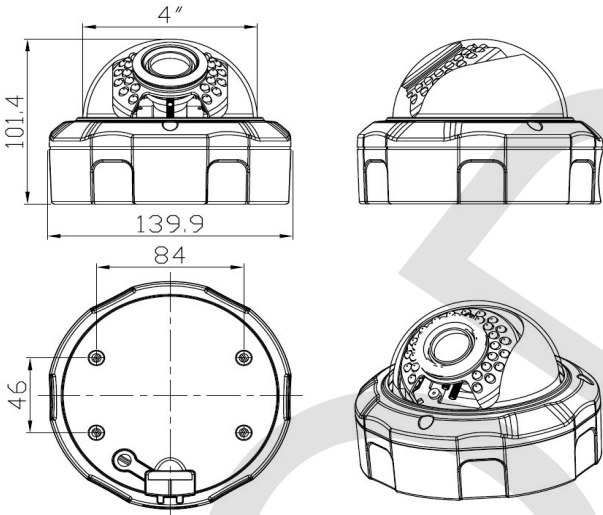

Accessories

- User Manual
- CD
- Screw fittings

Specification		
Product Name		H.265 5.0MP CCTV Video Surveillance IR Dome IP HD Camera
Model No.		WDM-HIP8500F
Video		
System		Hi3516A+OS05A10
Sensor		1/2.8" 5.0M Pixels Progressive CMOS Image Sensor
Output resolution		5.0MP(2592x1944)
D/N Mode		Auto switching, black and white video and IR cut action linkage
Illumination		0.05Lux@F1.2 (Color), 0Lux@F1.2(B/W)
SNR		≥50db(AGC OFF)
Gain Control		Auto
DNR		3DNR
WDR		DWDR(>80dB)
Video processing		H.265/H.264 video compression, dual streaming
		AVI format, 0.5M~8Mbps adjustable;
Video Output	Main streaming	2592*1944,2592*1520,2048*15361920*1080
	Sub streaming	D1,VGA,CIF
Frame rate		2592*1944@25/30fps, support 1~25/30fps/s adjustable
Network interface		RJ45 ethernet,10/100M;RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP protocol supported
Access Protocol		Standard ONVIF Protocol, Support third party access; PC;
		Support IE6.0 and above Smartphone
		Support Android\iPhone
Lens		
Lens		Standard 3.6mm lens(6mm lens/360° fisheye lens/2.7-13.5mm manual lens optional)
View Angle		3.6mm lens(6MP F2.0 1/2.8" H 85.7°); 6mm lens(6MP F2.0 1/2.8" H 52.7°); 2.7-13.5mm manual lens(6MP F1.8 1/2.8" H 113.9°-27.7°)
IR distance		25-35m(30pcs F5 IR leds)
Function		
Function		Support WEB configuration, OSD,real-time video transmission
		Support motion detection
		Support front end storage ,playback and download
		Support uniform client and platform system application
		Support complete SDK for second development.
Normal		
Material		Metal Case, White
Explosive-proof Grade		IK10
Weather Proof		IP66 Waterproof, Weather Resistance
Power supply		DC12V/POE(24W) optional
Operation temperature		-20°C~+60°C,10%~90%RH