


H.265 2.0MP CCTV Video Surveillance IR Bullet IP HD Camera



Features

- \* Hisilicon high-performance DSP
- \* High quality progressive scanning CMOS
- \* H.265/H.264 High profile
- \* Support dual stream, support mobile phone
- \* Support power supply DC12V/POE
- \* Standard ONVIF Protocol, support multi network protocols
- \* Metal case, Waterproof IP66

Dimension

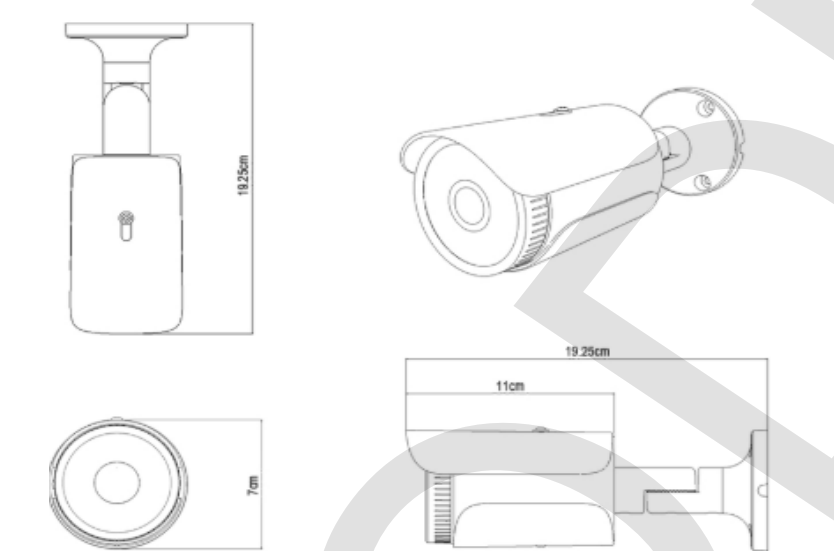

Accessories

- User Manual
- CD
- Screw fittings

| Specification         |                |                                                                                                                            |                                 |
|-----------------------|----------------|----------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| Product Name          |                | H.265 2.0MP CCTV Video Surveillance IR Bullet IP HD Camera                                                                 |                                 |
| Model No.             |                | WDM-HIP9200B                                                                                                               | WDM-HIP9200BH                   |
| Video                 |                |                                                                                                                            |                                 |
| System                |                | Hi3516EV200+Sony IMX307                                                                                                    | Hi3516D+Sony IMX290             |
| Sensor                |                | 1/2.8" CMOS Sensor                                                                                                         |                                 |
| Output resolution     |                | 2.0MP(1920×1080)                                                                                                           |                                 |
| D/N Mode              |                | Auto switching,black and white video and IR cut action linkage                                                             |                                 |
| Illumination          |                | Color: 0.001lux@F1.2; B/W: 0lux@F1.2                                                                                       |                                 |
| SNR                   |                | ≥50db(AGC OFF)                                                                                                             |                                 |
| Gain Control          |                | Auto/ Manual                                                                                                               | Auto                            |
| DNR                   |                | Support 2DNR, 3DNR                                                                                                         | 3DNR                            |
| WDR                   |                | DWDR(100dB)                                                                                                                | >120dB                          |
| Video processing      |                | H.265/H.264 video compression, dual streaming                                                                              |                                 |
|                       |                | AVI format, 0.7M~8Mbps adjustable;                                                                                         | 32KB ~16Mbps, support VBR, CBR  |
| Video Output          | Main streaming | 1920*1080,1280*960,1280*720                                                                                                | 1920*1080,1280*720, D1,VGA,QVGA |
|                       | Sub streaming  | 800*448,640*480,640*360,352*288                                                                                            | D1, VGA, QVGA                   |
| Frame rate            |                | 2.0MP@30fps,support 7~30fps/s adjustable                                                                                   | 1920*1080(1~25/30fps)           |
| Network interface     |                | RJ45 ethernet,10/100M;RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP protocol supported                                                 |                                 |
| Access Protocol       |                | Standard ONVIF Protocol, Support third party access; PC;                                                                   |                                 |
|                       |                | Support IE6.0 and above Smartphone                                                                                         |                                 |
|                       |                | Support Android\iPhone                                                                                                     |                                 |
| Lens                  |                |                                                                                                                            |                                 |
| Lens                  |                | Standard 4mm lens(6mm lens or 2.7-13.5mm auto lens optional)                                                               |                                 |
| View Angle            |                | 4mm lens(2MP F2.0 1/2.8" H 80.7°); 6mm lens(2MP F2.0 1/2.8" H 52.7°); 2.7-13.5mm auto lens(2MP F1.3 1/2.8" H 108.8°-28.8°) |                                 |
| IR distance           |                | 20-25m(36pcs F5 IR leds)                                                                                                   |                                 |
| Function              |                |                                                                                                                            |                                 |
| Function              |                | Support WEB configuration, OSD,real-time video transmission                                                                |                                 |
|                       |                | Support motion detection                                                                                                   |                                 |
|                       |                | Support front end storage ,playback and download                                                                           |                                 |
|                       |                | Support uniform client and platform system application                                                                     |                                 |
|                       |                | Support complete SDK for second development.                                                                               |                                 |
| Normal                |                |                                                                                                                            |                                 |
| Material              |                | Metal Case, White+Black                                                                                                    |                                 |
| Weather Proof         |                | IP66 Waterproof, Weather Resistance                                                                                        |                                 |
| Power supply          |                | DC12V/POE(24W) optional                                                                                                    |                                 |
| Operation temperature |                | -20°C~+60°C,10%~90%RH                                                                                                      |                                 |