


Filter+Regulator+Lubricator

Specification

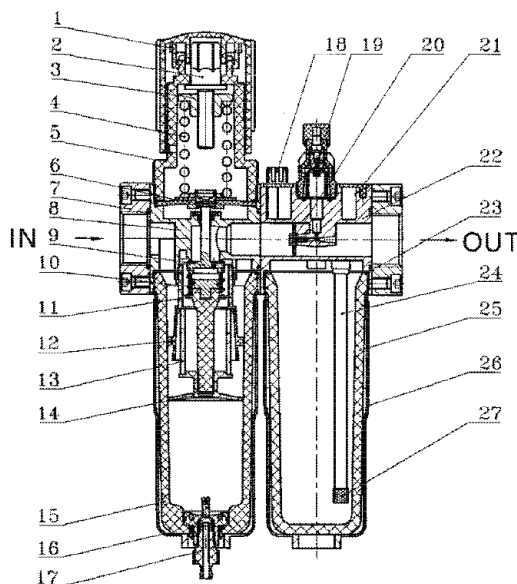
Type	OC1010-1032U、01	OC2010-01、02、03	OC4010-03、04、06	OC6010-06、08
Port size NPT	10-32U1/8"	1/8.1/4." 3/8"	3/8." 1/2." 3/4"	3/4." 1"
Gauge thread	M5	1/8"	1/4"	
Fluid	Compressed Air			
Operating pressure range	(0.5~0.85Mpa) 22~123Psi	0.15~1.2Mpa(22~174Psi)		
Max.Flow rate L/min	500	1700	3500	11500
Ambient temperature	-10~60℃(14~140℉)			
Filter precision	5μ m or 40μm			
Structure	Overflow type			
Guard cup	-	●	●	●



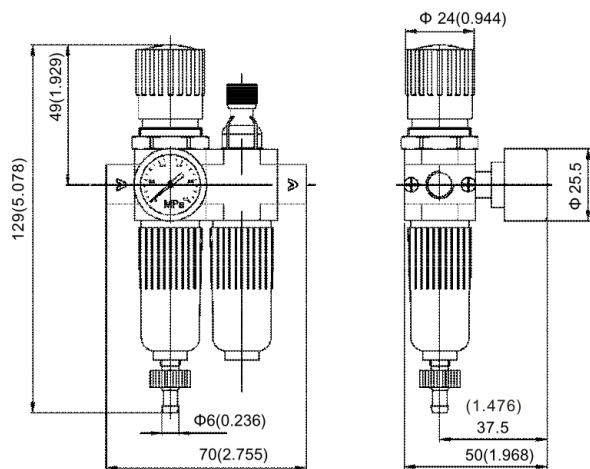
Ordering Code

SFOC	-	2010	-	01	-	D
OC Filter +Regulator +Lubeicator		Type: 1010 2010 4010 6010		Port size: 10-32u, 01:NPT1/8", 02:NPT1/4",03:NPT3/8", 04:NPT1/2",06:NPT3/4", 08:NPT1"		□: Manual drain D: Auto-drain;

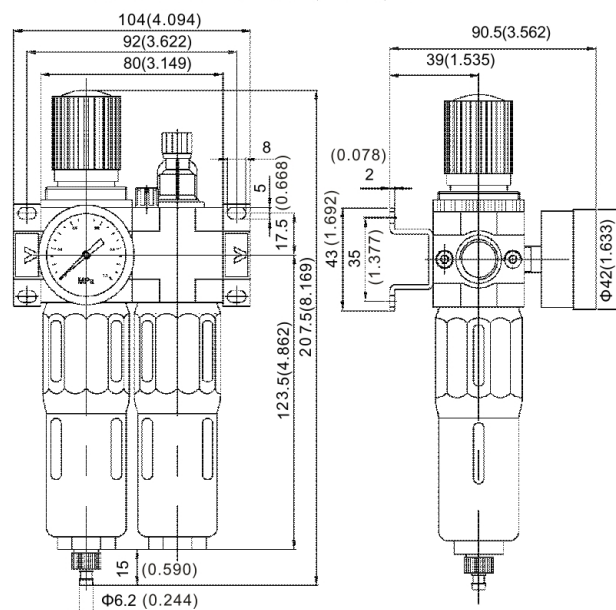
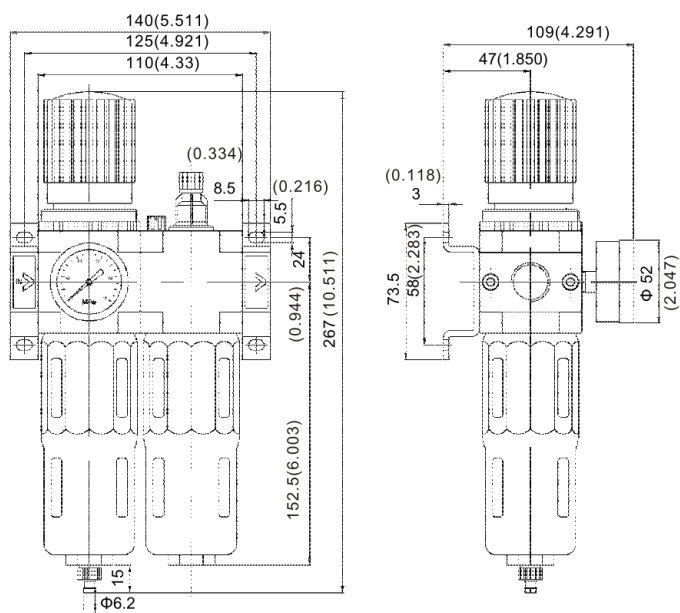
Overall Dimension



No	code	No	code
1	Adjustable button	15	Water cup
2	Adjustable launch	16	Guard cup
3	Nut	17	Drainer
4	Main adjustable spring	18	Plug
5	Valve cover	19	Oil window component
6	Diaphragm	20	Damping fin
7	Connecting block	21	Decorative cover
8	FRbody	22	Lubricator valve body
9	Cartridge	23	O-ring
10	Cartridge spring	24	Oil tube
11	Core pedestal	25	Oil cup
12	Impeller	26	Oil cup block
13	Filter core	27	Filter core
14	Barrier board		

Overall Dimension
mm(inch)
SFOC1010-10-32U、01


10-32U is without connector

SFOC2010-01、02、03

SFOC4010-03、04、06

SFOC6010-06、08
