


Filter Regulator

Specification

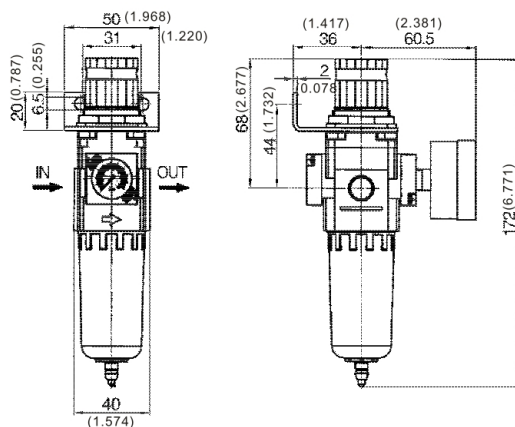
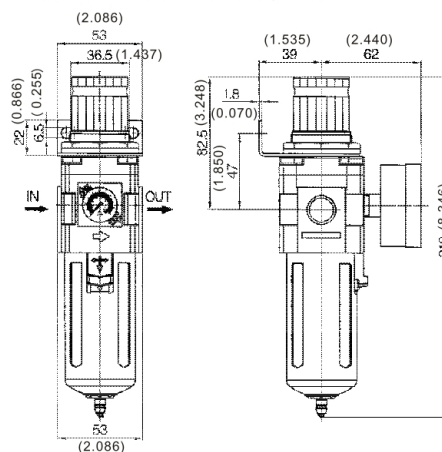
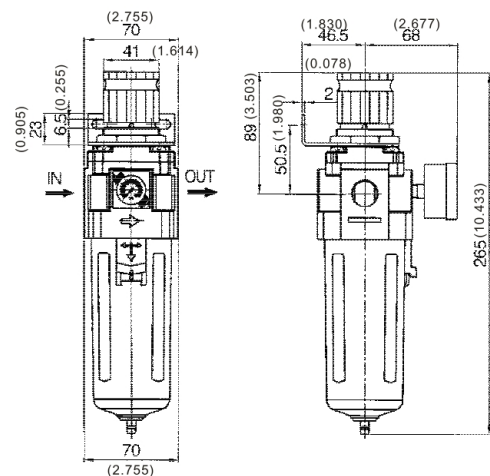
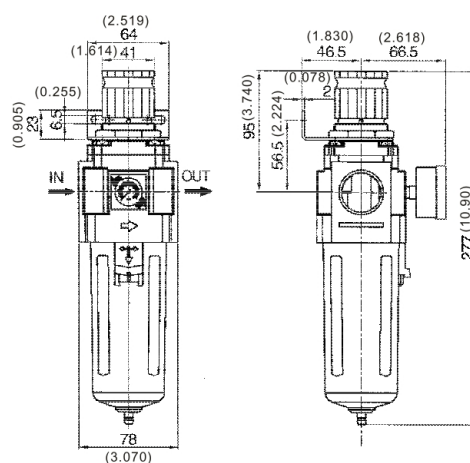
Type	AW2000A-01、02	AW3000A-02、03	AW4000A-03、04	AW5000A-06、08	AW6000A-06、08
Port size NPT	1/8" • 1/4"	1/4" • 3/8"	3/8" • 1/2"	3/4" • 1"	3/4" • 1"
Gauge thread	1/8"		1/4"		
Fluid	Compressed Air				
Operating pressure range	0.15~0.85Mpa(22-123Psi)				
Max.Flow rate L/min	900	2000	3000	5000	
Ambient temperature	-10~60℃ (14~140 ° F)				
Filter precision	5μ m or 40μm				
Cup material	Polycarbonate				
Guard cup	●	●	●	●	●

Notes 1:The guard cup of AW2000A series can be optional. 2:The cups of AW2000A、AW3000A series can be optional



Ordering Code

SFAW	-	5000	-	A	-	06	-	M	-	D
AW Filter Regulator		Type: 2000 3000 4000 5000 6000		A: Improved type Blank: Old type		Port size 01:NPT1/8", 02:NPT1/4",03:NPT3/8", 04:NPT1/2",06:NPT3/4", 08:NPT1"		M: Embed square gauge; Blank: Round gauge		□: Differential pressure drain, D: Auto-drain;

Overall Dimension
mm(inch)
SFAW2000A-01、 02

SFAW3000A-02、 03

SFAW4000A-03、 04

SFAW5000A-06、 08

SFAW6000A-06、 08
