



Shandong LEWIN Medical Equipment Co., Ltd. is a professional medical equipment manufacturer with certificates, such as CE, FDA, ISO9001, ISO13485, SGS, Rohs, MHRA, FSC(Free Sales Certificate) and located in Qufu city of Shandong Province, China. We have R&D center in Shandong, Shanghai, Shenzhen to launch new products to meet the needs for hospital every year. We have more than 50,000 square meters workshop and R&D building, which is characterized by high quality products and advanced technology.

**LEWIN** ADD: NO. 2 FAZHAN AVENUE, ECONOMIC DEVELOPMENT ZONE, QUFU, SHANDONG PROVINCE, CHINA 273100  
 TEL: +86-537-3748923, FAX: +86-537-3748935  
 EMAIL: lewin@lewinmed.com  
 LEWIN MEDICAL EQUIPMENT CO. LTD. Website: www.lewinmed.com



## ELECTRO HYDRAULIC OT TABLE CreBle 3000

LEWIN MEDICAL EQUIPMENT CO. LTD.



STRIVING FOR EXCELLENCE

SPECIFICATIONS

PARAMETERS

OPERATIONS

FEATURES

ACCESSORIES

# CreBle 3000

## ELECTRO HYDRAULIC O.T. TABLE



Best Radiolucent Fibre Table Top



### ACCESSORIES



Anti static lithotomy crutches swiveling type with ball socket, leg strap & ss clamps



Adjustable padded side support



Anaesthetic screen



Anaesthesia arm board with ss clamp, wrist strap having 360° rotation & tilting 30° both sides



Anti static shoulder support with bar and SS clamps



Body straps



Urological extender/ adapter with drainage tray to extend seat section more than 30 cm



Rail Clamps



Clamps

## FEATURES



Head & Leg Section are detachable & interchangeable



Back section for X-Ray cassette holding



Head Section up  
Pillow position up to 90°



Head Section Down



Leg Section Down 90° & Split apart 180°




Split Leg Section

## SPECIFICATIONS

- Modular C-Arm image intensifier fully X-Ray radiolucent table top divided into 5 sections and back section with integrated slot/ channel for X-Ray cassette holding.
- Detachable head section provided with gas spring assisted for tilting facility. Head & leg sections are interchangeable & can be removed easily with single touch.
- Detachable two section leg plate provided with gas spring assisted tilting facility.
- Medical Grade 304# full stainless steel materials including side rails with epoxy powder coated, fully scratch less and waterproof.
- Two Controllers with table:
  1. Wired remote control.
  2. Keypad flush integrated controller on central column.
- Facilities for motorized height adjustment, trendelenburg, reverse trendelenburg, left tilt/ lean, right tilt/ lean, flex, reflex, back section up & down, longitudinal slide, one button chair position, one button zero position for getting table back to normal position from any position, kidney elevation and self leveling floor lock.
- The hand held remote shows symbolic presentation of all positions for clear display of operations.
- Inbuilt manual override control panel on table column can be used for all operations in case of power failure or loss of hand controller.
- Longitudinal slide of 300mm both sides allows access of C-Arm for 1700mm of table length.
- Base height - 150mm accommodates modern MIS & bariatric procedures. Maximum room for the feet ensures comfortable surgeon work position.
- 360° directional rotative four wheel casters for easy movements and self-leveling central floor locks for stability on uneven floors.
- Back section with integrated slot/channel for X-Ray cassette holding that can be inserted from both ends and can take X-Ray of whole body.
- Seat section with U-shaped cut-out for gynecology position. Two separate & detachable leg section having facility for up/ down, tilting & splitting apart laterally to 180°.
- Table top consist of 4/ 5 sections covered with detachable radiolucent, antistatic-electric conductive latex free mattress of 50mm thickness designed for patient comfort & prevent pressure ulcer.
- Designed for a patient weight of 300 kgs in normal position and 250 kgs in positions like trendelenburg, tilt etc.
- UPS power supply rechargeable built-in battery system having sufficient capacity for backup of more than 8 hours (100 operations) in event of power failure.

## PARAMETERS

PARAMETERS	FEATURES
	<b>MODEL: CreBle 3000</b>
Length and Width (LxW)	2160mm (L) x 580mm (W)
Height Adjustment (electrical)	650 mm (minimum) - 1000 mm (maximum)
Lateral Tilt (electrical)	20° Left and Right
Trendelenburg & R. Trendelenburg (electrical)	30° both
Back section (electrical)	80° up and 40° down
Longitudinal Slide (electrical)	300mm (both sides)
Built-in kidney elevation (electrical)	120mm
Flex/ Reflex (electrical)	220°/ 110°
Leg section adjustment (manual)	20° up and 90° down
Head section adjustment (manual)	90° up and 45° down
Maximum Weight Bearing	300 kgs
Power Source	220V - 240V, 50Hz - 60Hz

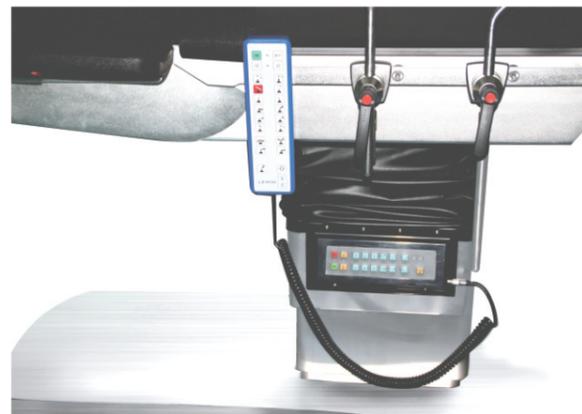

Wired & integrated controller on column with on/ off switch, lock/ unlock for self level floor locking, minimum & maximum height, trendelenburg & reverse trendelenburg, lateral tilt, back section up & down, longitudinal slide, one button flex & reflex, chair position, zero position from any position.

## OPERATIONS



Minimum Height: 650mm



Maximum Height: 1000mm



Trendelenburg: 30°



One Button Chair Position



Reverse Trendelenburg: 30°



Left Lean/ Tilt 20°



Right Lean/ Tilt 20°



Longitudinal Slide 300mm



Flex 220°  
Kidney Position 120mm



Reverse Flex 110°



Electric Hydraulic Brake System