



SHIJIAZHUANG NAIPU PUMP CO., LTD  
石家庄耐普泵业有限公司

## 6/4 D-AH High chrome mineral slurry pump





## 6/4 D-AH Slurry Pump

Metal lined, metal impeller, Warman replacement pump

Max Power: 60 kw

Pump Flow: 162-360 m<sup>3</sup>/h

Pump Head: 12-56 m

Pump Speed: 800-1550 rpm

Max Efficiency: 65 %

NPSH: 5-8 m

Impeller Vane: 5 (standard)

Impeller Diameter: 365 mm

Seal type: Gland packing seal, expeller seal, mechanical seal, dynamic seal...

Material: A03, A04, A05, A06, A07, A12, A14, A25, A33, A49, A51, Cr24, Cr26, Cr27, Cr30, Cr28, Cr36...

### Pump construction




#### Main Part Number At The Drawing

|                      |                               |
|----------------------|-------------------------------|
| 032: Frame Plate     | 122: Stuffing Box Seal        |
| 060: Intake Joint    | 036: Frame Plate Liner        |
| 132: Discharge Joint | 013: Cover Plate              |
| 083: Throatbush      | 018: Cover Plate Liner        |
| 110: Volute Liner    | 124: Volute Liner Seal        |
| 147: Impeller        | 041: Frame Plate Liner Insert |



SHIJIAZHUANG NAIPU PUMP CO., LTD  
石家庄耐普泵业有限公司

- 2 -

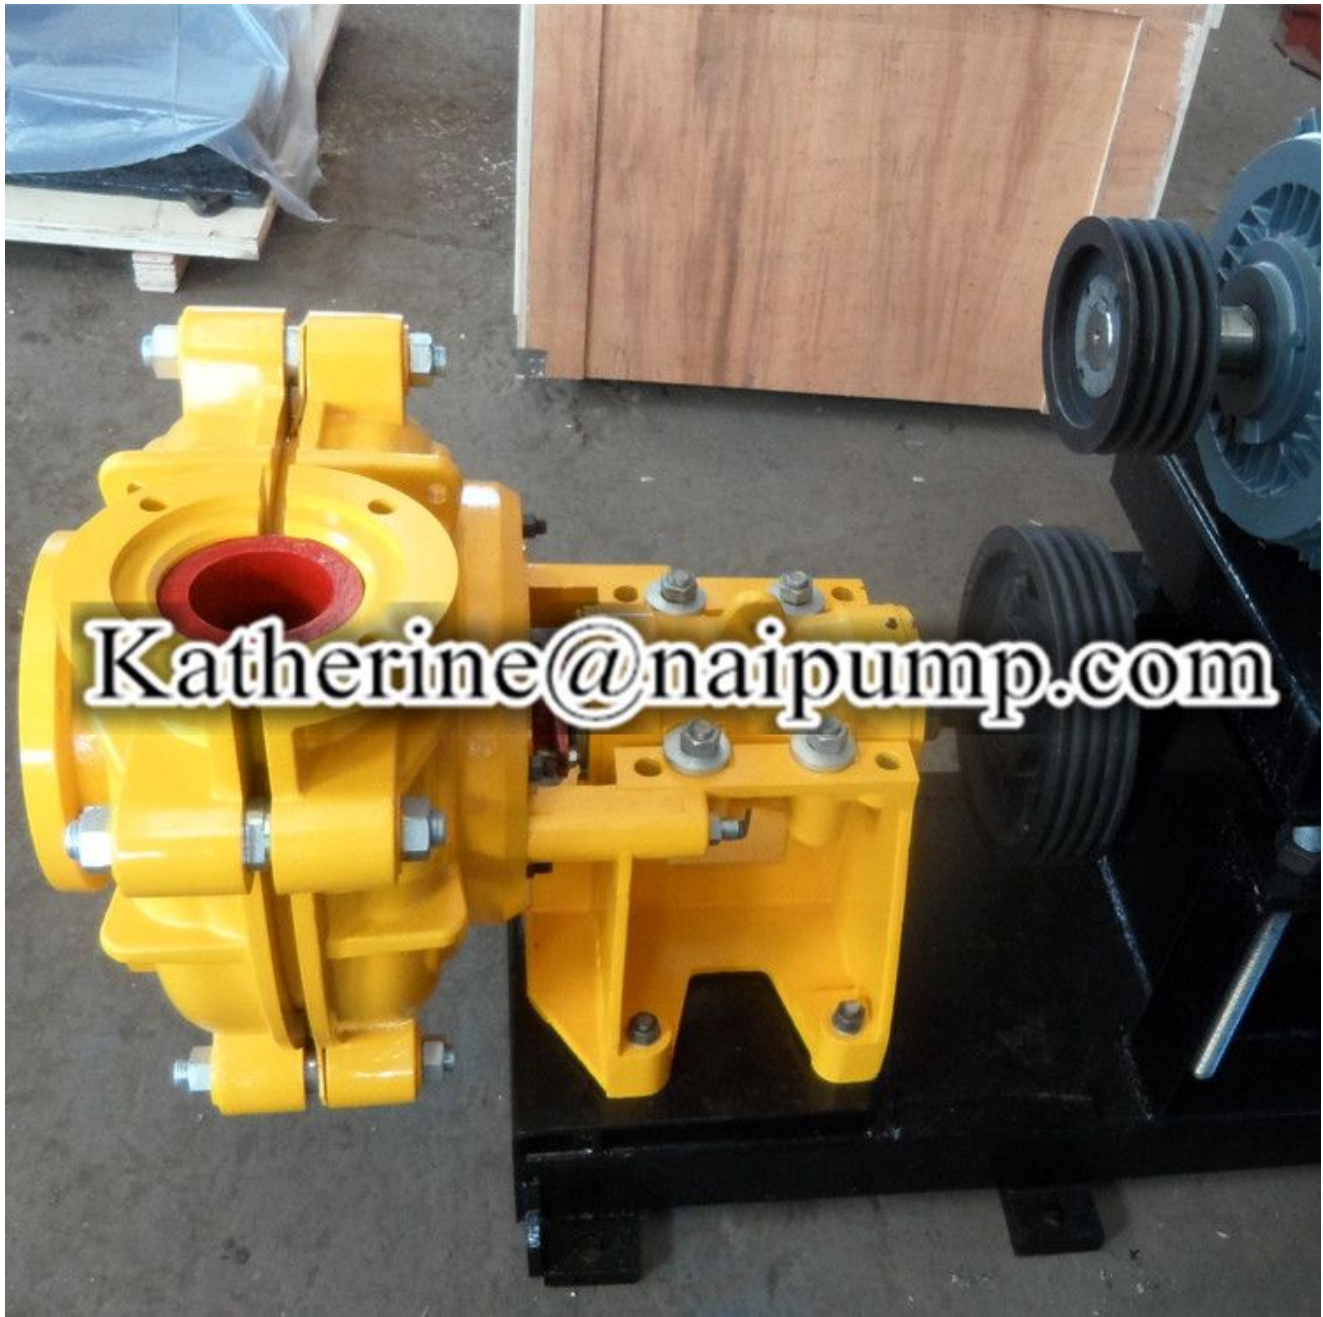

Katherine@naipump.com



SHIJIAZHUANG NAIPU PUMP CO., LTD  
石家庄耐普泵业有限公司


- 3 -





## Selection Chart

( **Note:** Approximate performance for clear water, to be used for primary selection only.)

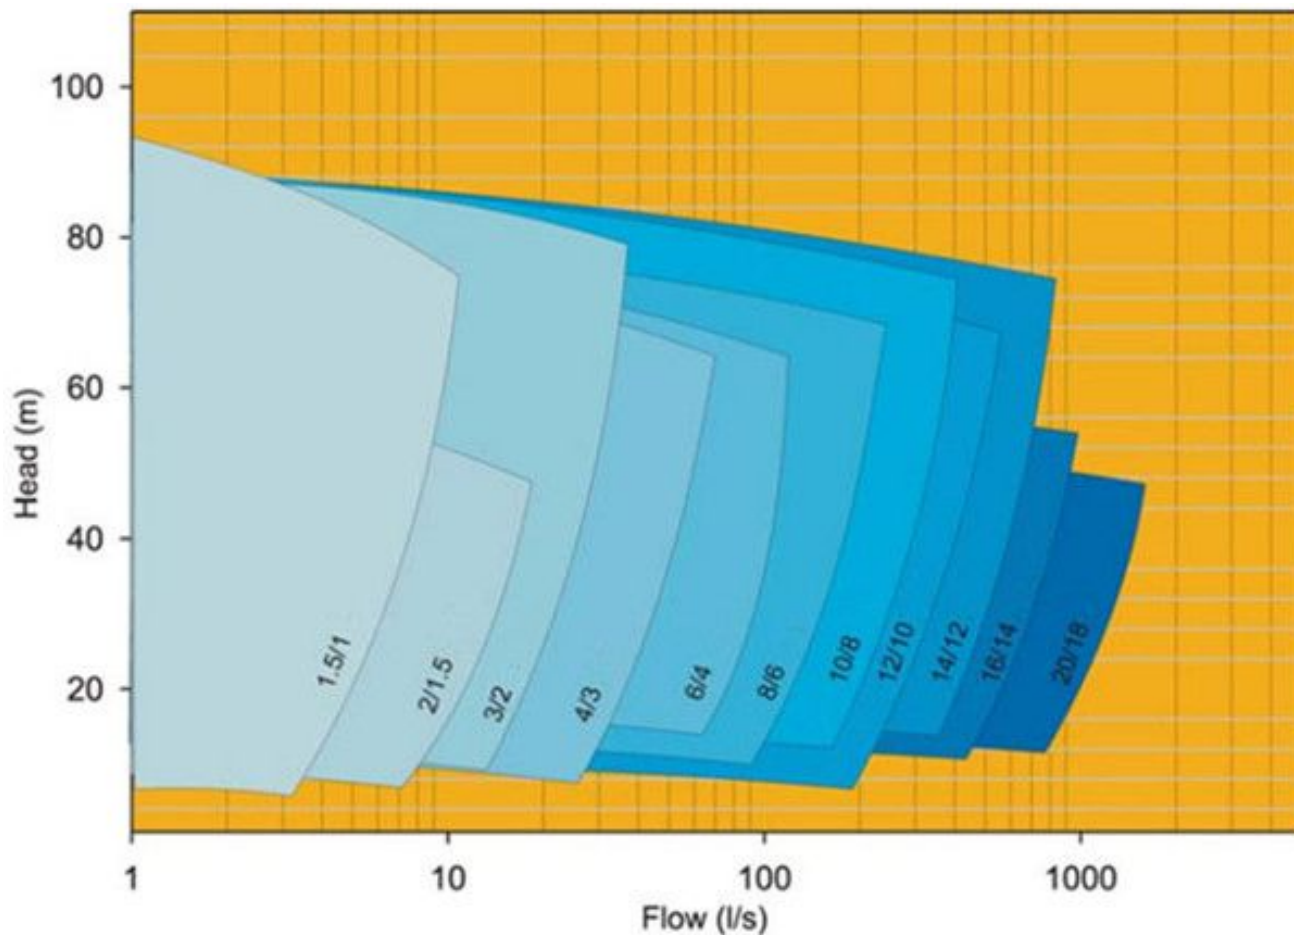

## Katherine

Tel: +86-311-83802338 Fax: +86-311-87162902

Cellphone: +86-15028111051 WeChat: [katherine\\_cn](#)

Skype: [katherine\\_naipump](#) URL: [www.naipump.com](http://www.naipump.com) Email: [katherine@naipump.com](mailto:katherine@naipump.com)