




HSF



ROHS



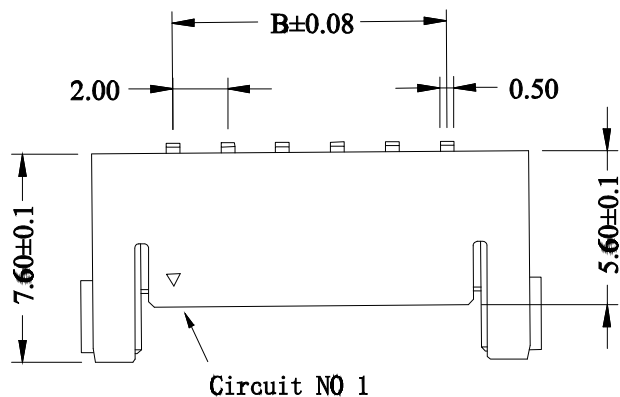


Specifications :

- Voltage rating: 250V AC/DC
- Current rating: 6.5A AC/DC .
- Withstanding voltage: 800V AC/mInute
- Temperature range: -25° C~+85° C
- Insulation resistance:1000MΩ
- Contact resistance: 20mΩ
- After environmental testing: ≤20mΩ
- Material (Pin): Brass

WAFER

- Part NO: AW2020R-XP
- Material:
- PIN:Brass/Gold Flash
- Shell:Brass/ Tin-Plated
- Wafer: PA4T, UL94V-0
- Color: Black
- Mates with:AH2020 series Housing

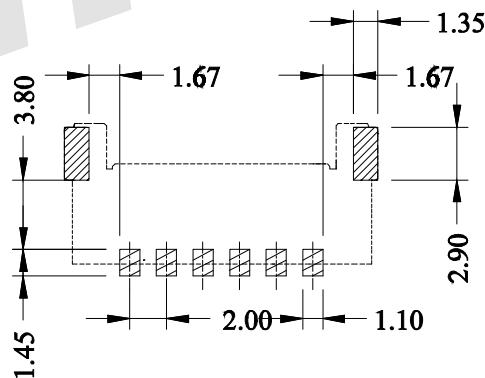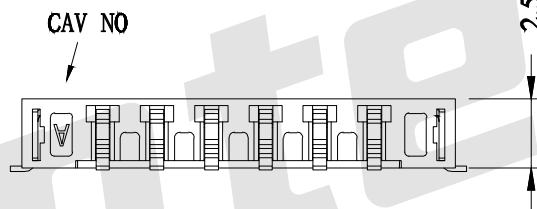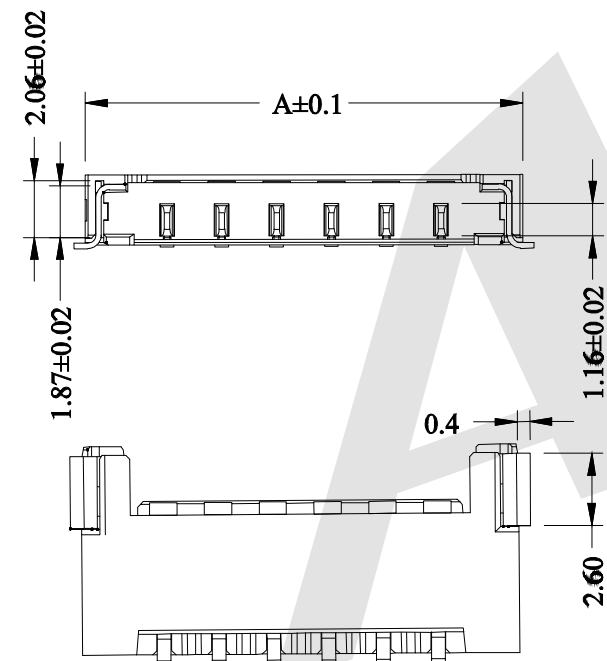

Dimensions


PIN.	DIM A	DIM B
2pin	7.65	2
3pin	9.95	4
4pin	11.95	6
5pin	13.95	8
6pin	15.95	10
7pin	17.95	12
8pin	19.95	14
9pin	21.95	16

Unless Otherwise specified tolerance
 X. ±0.35 X.XX:±0.20
 X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
 DRAW: Yin Han DATE: 02/28/2024
 CHECK: Bob Yang DATE: 02/28/2024

Antenk® ANTENK ELECTRONICS CO.,LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE:
 2.00mm Pitch 90° SMT Wafer Connector Series



DRAWING NO: AW2020R-XP
 PRODUCT NO: AW2020R-XP

REV	DESCRIPTION	DATE