

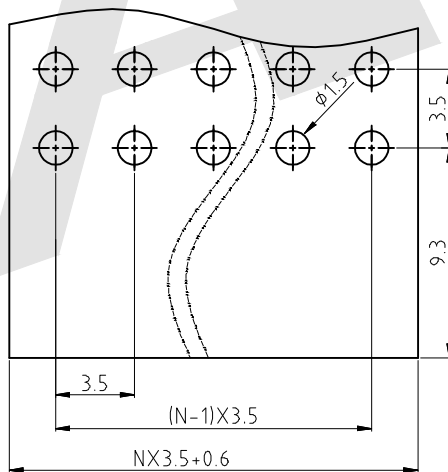


HSF  RoHS

N=Number of contacts

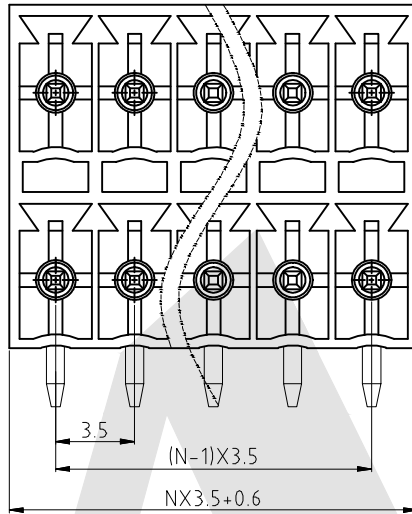

PCB LAYOUT

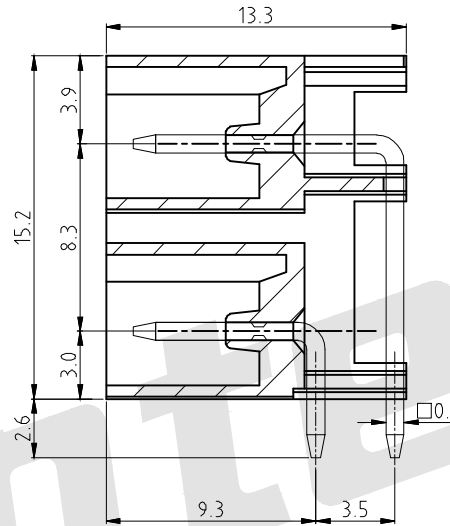

Technical Data:

Material:

Solder Pin: Copper Alloy Tin plated
Insulator body(housing):polyamide
(Glass filled)(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating:12A

Withstanding Voltage: AC2500V(1min)

Mechanical:

Using temperatur Range:-40°C to +105°C

Soldering temperature:+250°C,5seconds Max.

AT2500HR - 3.5 - XX - X - EFR

Pitch:
3.5: 3.5mm

Poles:
04: 4 Contacts
05: 5 Contacts
... ..
32: 32Contacts

Insulator color:
A:Green
B:Blue
C:Black
G:Gray
O:Orange

EFR:Series number

Unless Otherwise specified tolerance
X.±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

Customer's Request

As Shown

DRAW

Wu Sai

CHECK

BobYang

UNIT:


mm

DATE

22/03/2018

DATE

22/03/2018



 ANTENK ELECTRONICS
Tel: +86 755 2999 7777
E-mail:sales@antenk.com

TITLE: Plug-in Terminal Block
Right-Angle Pitch:3.5

DRAWING NO: AT2500HR-3.5XXX-EFR

PRODUCT NO: AT2500HR-3.5XXX-EFR

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8