

HSF



ROHS

SPECIFICATION

Current Rating: 3.0 Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20m ohms max
Dielectric Withstanding: AC500V
Operating Temperature:-65° C to +125° C
Contact Material: Brass
Insulator Material: PBT, UL 94V-0 Black

Ordering Code:

FHES15 - X - X - D - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts
02 To 80

③ Contact Plating:
G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Connector Type
D: Dual⑤ Plastic High:
H: 6.8





Please mark the desired length in the H

⑥ Insulator Material

A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T

⑦ Packing


A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP

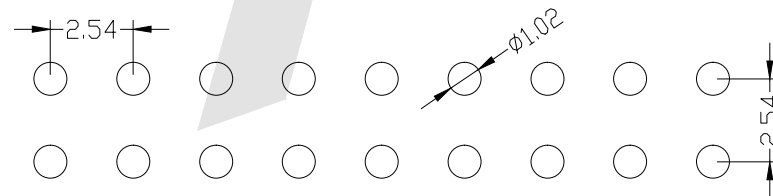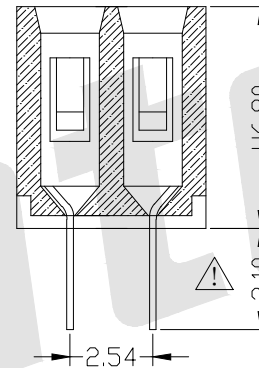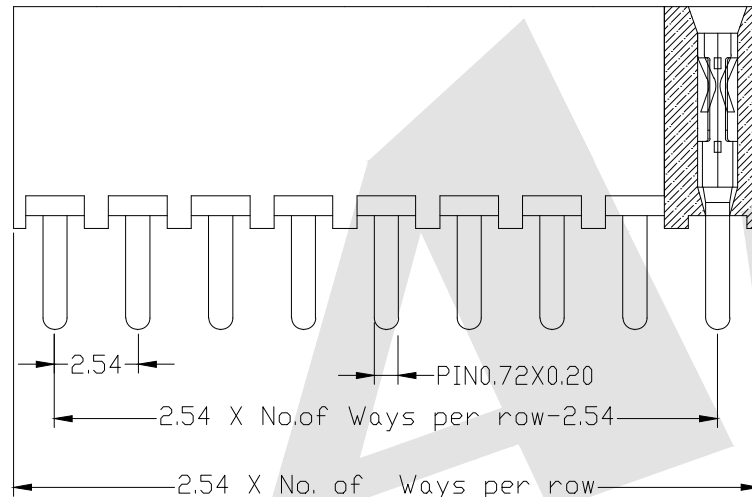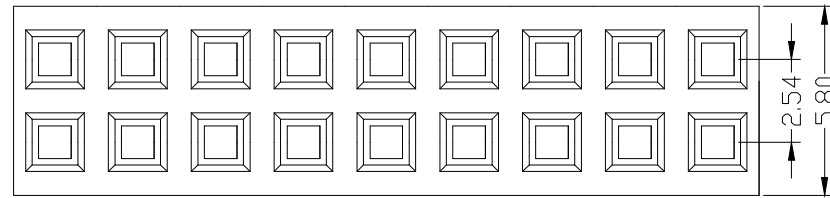

PCB LAYOUT

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown UNIT: mm
DRAW
YG ZHONG DATE
01/05/2016
CHECK
BobYang DATE
01/05/2016



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
2.54mm Female Header Dual Row
Straight Type (W=5.8 H=6.8)

DRAWING NO: FHES15-XXDXXX

PRODUCT NO: FHES15-XXDXXX

CHANGE DIP 3.5MM TO 3.1MM

15/09/2020

REV

DESCRIPTION

DATE