


HSF



ROHS




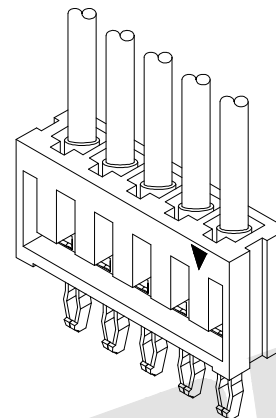


SPECIFICATIONS

- Current rating: 3A AC.DC
- Voltage rating: 250V AC.DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -40°C~+105°C
- Compliant with RoHs and REACH

HOUSING

- Part NO. :BH2512-XP
- Material: Nylon 66, UL94v-0
- Suitable BT2512T series Terminal
- Color: Natural (White)

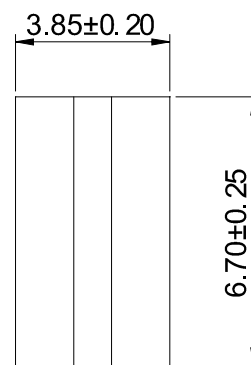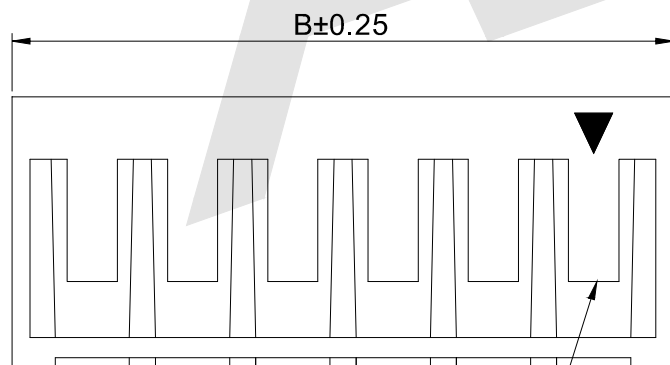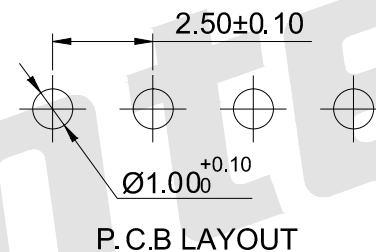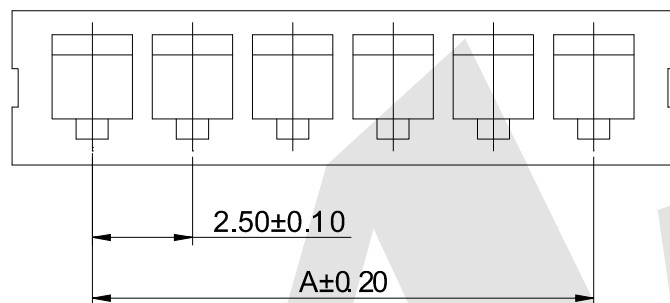

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
BH2512-2P	2.50	6.70
BH2512-3P	5.00	9.20
BH2512-4P	7.50	11.70
BH2512-5P	10.00	14.20
BH2512-6P	12.50	16.70
BH2512-7P	15.00	19.20
BH2512-8P	17.50	21.70
BH2512-9P	20.00	24.20
BH2512-10P	22.50	26.70
BH2512-11P	25.00	29.20
BH2512-12P	27.50	31.70
BH2512-13P	30.00	34.20
BH2512-14P	32.50	36.70
BH2512-15P	35.00	39.20
BH2512-16P	37.50	41.70

Unit: mm

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15



ANTENK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 7/8/2018
CHECK Bob Yang	DATE 7/8/2018

TITLE: 2.50mm pitch Housing connector series



DRAWING NO: BH2512-XP

PRODUCT NO: BH2512-XP

REV	DESCRIPTION	DATE