

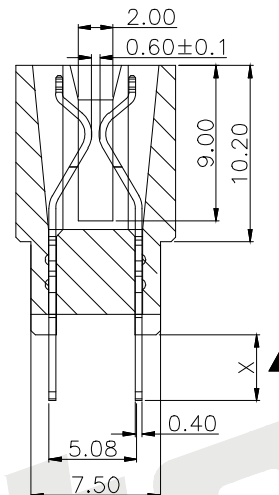


HSF

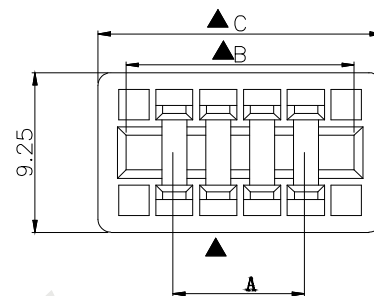


ROHS

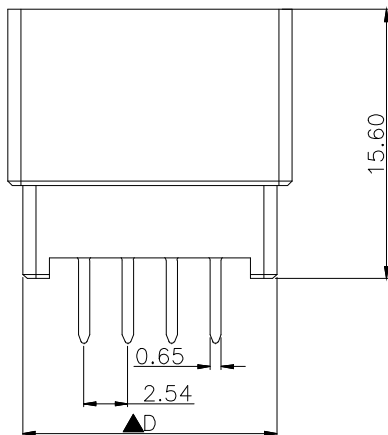


DESCRIPTION

Pin	A	B	C	D	Pin	A	B	C	D
4	2.54	7.92	11.37	9.62	64	78.74	84.12	87.57	85.82
6	5.08	10.46	13.91	12.16	66	81.28	86.66	90.11	88.36
8	7.62	13	16.45	14.7	68	83.82	89.2	92.65	90.9
10	10.16	15.54	18.99	17.24	70	86.36	91.74	95.19	93.44
12	12.7	18.08	21.53	19.78	72	88.9	94.28	97.73	95.98
14	15.24	20.62	24.07	22.32	74	91.44	96.82	100.27	98.52
16	17.78	23.16	26.61	24.86	76	93.98	99.36	102.81	101.06
18	20.32	25.7	29.15	27.4	78	96.52	101.9	105.35	103.6
20	22.86	28.24	31.69	29.94	80	99.06	104.44	107.89	106.14
22	25.4	30.78	34.23	32.48	82	101.6	106.98	110.43	108.68
24	27.94	33.32	36.77	35.02	84	104.14	109.52	112.97	111.22
26	30.48	35.86	39.31	37.56	86	106.68	112.06	115.51	113.76
28	33.02	38.4	41.85	40.1	88	109.22	114.6	118.05	116.3
30	35.56	40.94	44.39	42.64	90	111.76	117.14	120.59	118.84
32	38.1	43.48	46.93	45.18	92	114.3	119.68	123.13	121.38
34	40.64	46.02	49.47	47.72	94	116.84	122.22	125.67	123.92
36	43.18	48.56	52.01	50.26	96	119.38	124.76	128.21	126.46
38	45.72	51.1	54.55	52.8	98	121.92	127.3	130.75	129
40	48.26	53.64	57.09	55.34	100	124.46	129.84	133.29	131.54
42	50.8	56.18	59.63	57.88	102	127	132.38	135.83	134.08
44	53.34	58.72	62.17	60.42	104	129.54	134.92	138.37	136.62
46	55.88	61.26	64.71	62.96	106	132.08	137.46	140.91	139.16
48	58.42	63.8	67.25	65.5	108	134.62	140	143.45	141.7
50	60.96	66.34	69.79	68.04	110	137.16	142.54	145.99	144.24
52	63.5	68.86	72.33	70.56	112	139.7	145.08	148.53	146.78
54	66.04	71.42	74.87	73.12	114	142.24	147.62	151.07	149.32
56	68.56	73.96	77.41	75.66	116	144.78	150.16	153.61	151.86
58	71.12	76.5	79.95	78.2	118	147.32	152.7	156.15	154.4
60	73.66	79.4	82.49	80.74	120	149.86	155.24	158.69	156.94
62	76.2	81.58	85.03	83.28	128	160.02	165.4	168.85	167.1

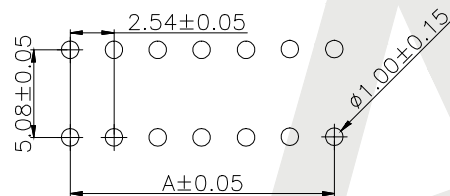

Recommended P.C.B. Layout

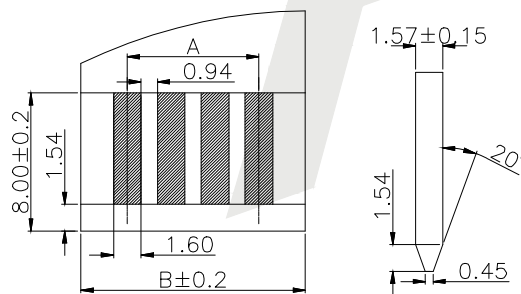

Recommended CARD Layout

SPECIFICATION

1. CURRENT RATING: 3AMP
2. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC RMS 60Hz. 1MIN
3. CONTACT RESISTANCE: 20 MILLIOHMS MAX
4. INSULATION RESISTANCE: 5000 MEGOHMS MIN. At 500V DC
5. OPERATION TEMPERATURE: -40° C TO +85° C
6. INSERTION FORCE: 0.4Kgf MAX. Per Pair

Insulator: PBT/LCP+G.F. (UL94V-0)

CONTACT: BRASS OF PHOSPHOR BRONZE GOLD PLATED ON CONTACT AREA

TIN PLATED ON SOLDER TAILS, OVER NICKEL

Order code:

ECCS - X - B - B - SO - X - B - 01

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① SERIES NO: ECCS
- ② Number of Pins: X
FOR Example: 128=128P
- ③ Pitch: B: 2.54MM
- ④ DIP Length: X
SEE TABLE
- ⑤ Contact Plating
G0: Gold flash
S0: Gold flash/Ni
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 30U" Gold
SN: Tin
- ⑥ Plastic Materials:
P: PBT
L: LCP
- ⑦ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
- ⑧ Product NO.: 01

DIP LENGTH UNIT: MM

A	1.8	K	7
B	3.8 Standard	L	8
C	6.3	M	9
D	13.8	N	10
E	1	O	11
F	2	P	12
G	3	Q	13
H	4	R	14
I	5	S	15
J	6		


Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW Wu Feng Rong DATE 23/10/2020

CHECK BobYang DATE 23/10/2020



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail: sales@antenk.com

TITLE:

2.54mm Slot Straight DIP Connectors

DRAWING NO: ECCS-XBBS0XB01

PRODUCT NO: ECCS-XBBS0XB01

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8