

HSF



ROHS



Technical requirements:

1. Materials shall meet Rosh requirements;
 2. There should be no severe front on the surface (0.06);
 3. Surface treatment: nickel plating, electroplating quality requirements: 2% concentration of brine, 48 hours
 4. Refer to GB / t150115-200 - tolerance table for dimensions without tolerance indication;
 5. After riveting, the spring should be upright, and the parts should not be deformed;
- The riveted joint is firm and reliable with good conductivity
6. Belt specification: 0.3 (thickness) X36 (width) x15.1 (step length);Heat treatment (tempering) of cold rolled plate + carbon steel wire
 - Spring::
 7. The end face of the spring should be made safe, tempered and shaped $\phi 0.5\text{mm}$
 8. Mark "★" is the key monitoring size.

Order Code:

BS - S - SI - B - 173DN
① ② ③ ④ ⑤

- ① BS: Battery Contacts
② Apperance for the product
S:180 TYPE
③ Contact PIating
SI:Nickel Plate
SN:Tin
G0:G0ld flash
G1: 3U" Gold
G2: 5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
④ Packing Method
A: Tray Packing
B: BAG PACKING
R: Tape & Reel Packing
⑤ Product Number
173DN

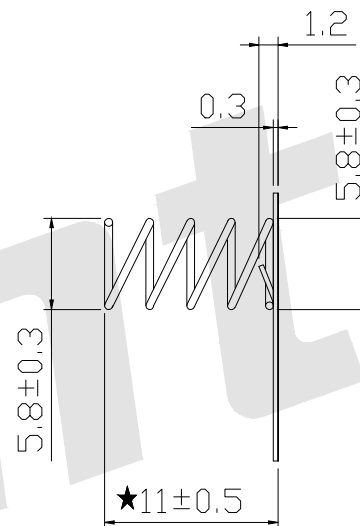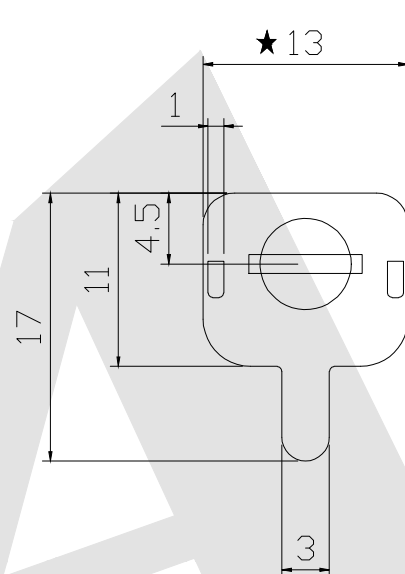


Negative

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:
As Shown
DRAW
Wu Feng Rong
CHECK
BobYang

UNIT:
mm
DATE
05/06/2021
DATE
05/06/2021



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 5# Cell Battery Contacts(Negative) 173DN

DRAWING NO: BS-S-SI-B-173DN

PRODUCT NO: BS-S-SI-B-173DN

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8