
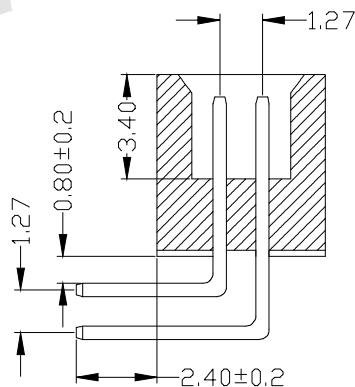
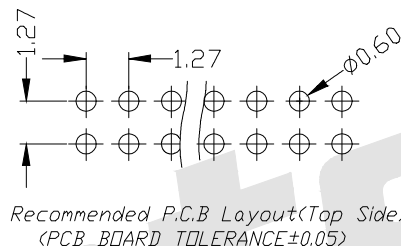
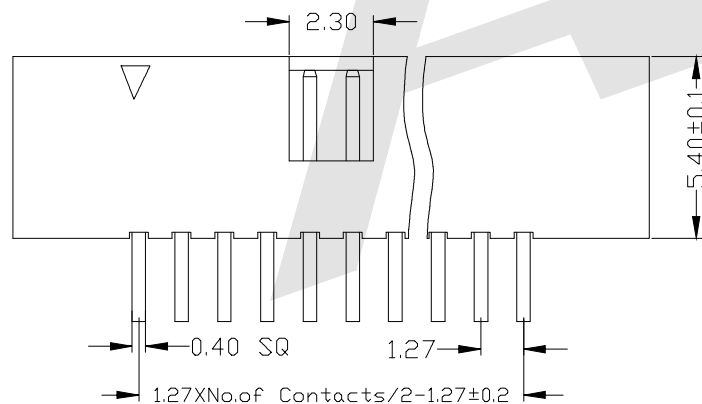


HSF

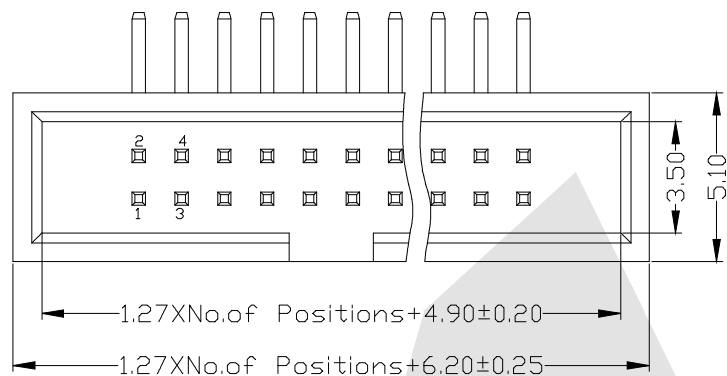

SPECIFICATION

Current Rating:	1Amp
Insulation Resistance:	1000MΩmin
Contact Resistance:	20mΩmax
Withstand Voltage	500V AC/DC
Contact Material:	Brass
Contact Plating:	Au or Sn Over Ni
Insulator Material:	PA6T+30%GF UL 94V-0
Operating Temperature:	-40°C to +105°C
Available For Poles at Present:	⚠
	4P,10P,12P,20P,22P,24P,26P,30P,40P,44P

Ordering Code:


BHAR03 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

- ① Series No:
② No. of Contacts
10-100P
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN: Tin
- ④ Color Insulator
B:Black
U:Blue
W:White
⑤ Insulator Material
A:PA6T
B:LCP
E:PA9T
⑥ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown
DRAW
YG ZHONG
CHECK
BobYang

UNIT:
mm
DATE
01/05/2016
DATE
01/05/2016



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.27mm Box Header 90°, H=5.4mm

DRAWING NO: BHAR03-XXXXXX

PRODUCT NO: BHAR03-XXXXXX

⚠ Available For Poles at Present

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8