



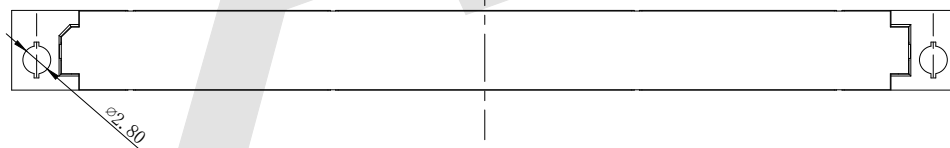



HSF

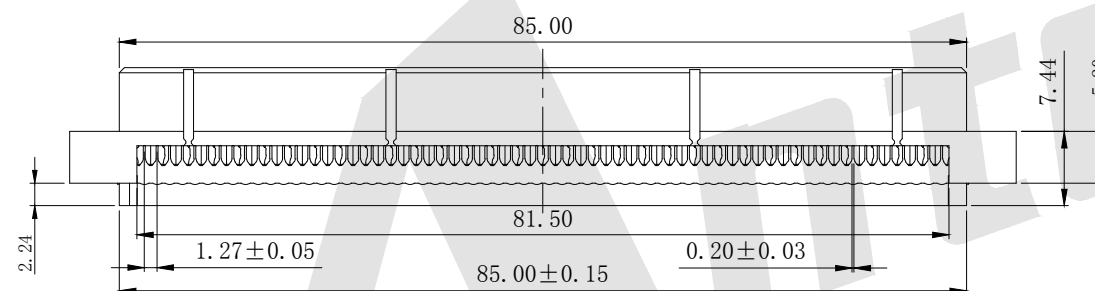

ROHS

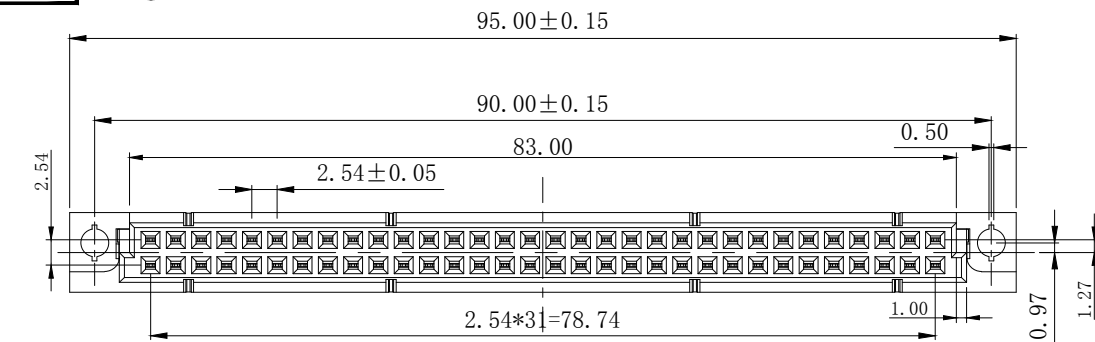

Mating Height

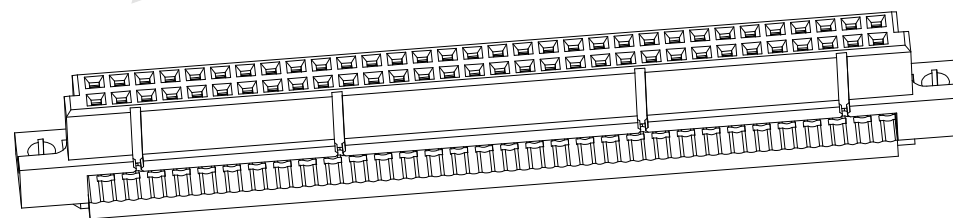

3D VIEW

SPECIFICATION

Current Rating: 3.0A

Insulation Resistance: 1000MΩ min.

Contact Resistance: 30mΩ max

Withstand Voltage: AC 1000V For 1 Minute

Operating Temperature: -55° C to +105° C

Contact Material: Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: PBT+30%GF UL 94V-0

Ordering Code:

DID - 64 - S0 - A - B - 2R
① ② ③ ④ ⑤ ⑥

- ① Series No: ④ Insulator Material
② No. of Contacts A: PBT
64: 64P B: PA6T
③ Contact Plating C: LCP
G0: Gold flash D: PA46
S0: Gold flash/Ni E: PA9T
G1: 3u" Gold ⑤ Packing
S1: 3u" Gold/Ni A: Tray
G2: 5u" Gold B: Bag
S2: 5u" Gold/Ni T: Tube
G3: 10u" Gold U: Tube+CAP
S3: 10u" Gold/Ni R: Tape&Reel
G4: 15u" Gold W: Tape&Reel+CAP
S4: 15u" Gold/Ni ⑥ Series number
G5: 30u" Gold 2R
S5: 30u" Gold/Ni
SN: Tin

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
DRAW Wu Feng Rong DATE 14/10/2020
CHECK BobYang DATE 14/10/2020



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE: DIN41612 Vertical Female Type
64P IDC Connectors 2Row

DRAWING NO: DID-64-S0AB-2R

PRODUCT NO: DID-64-S0AB-2R



ADD MATING HEIGHT

12/12/2020

DESCRIPTION

DATE

REV

1 2 3 4 5 6 7 8