


HSF



ROHS

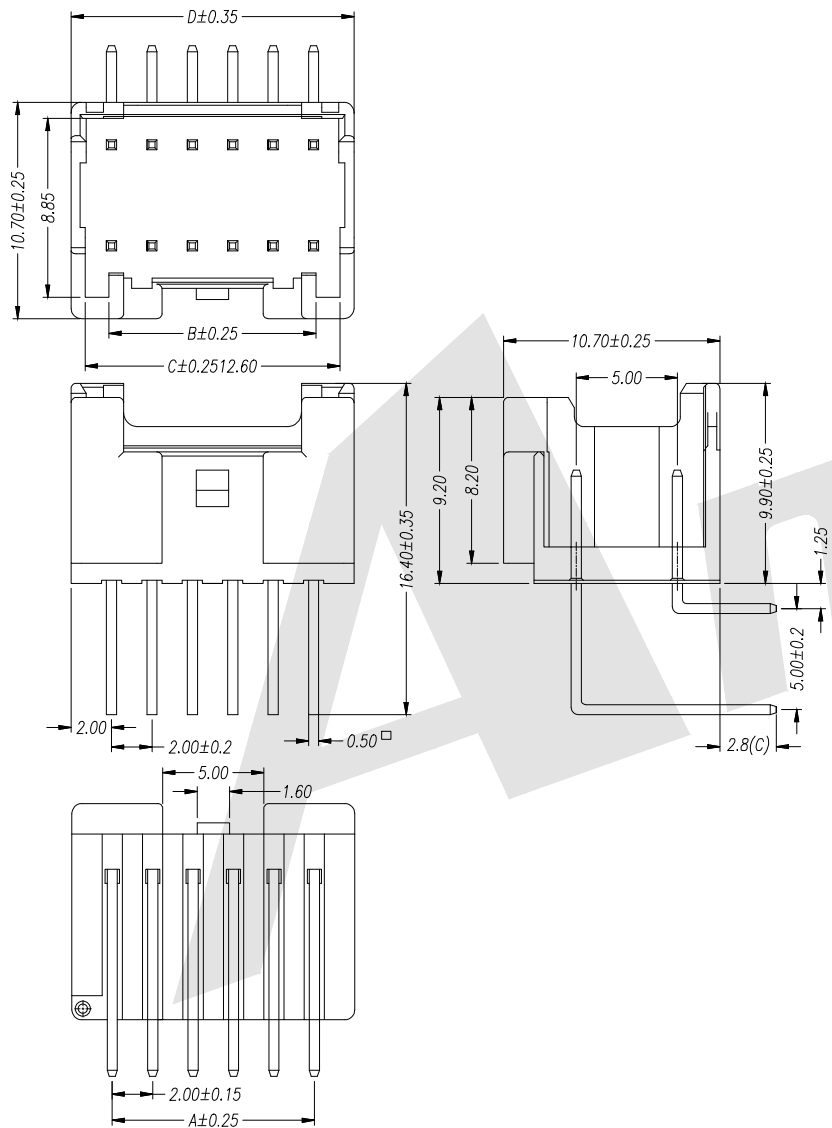


44.0	42.60	40.25	40.0	42
42.0	40.60	38.25	38.0	40
40.0	38.60	36.25	36.0	38
38.0	36.60	34.25	34.0	36
36.0	34.60	32.25	32.0	34
34.0	32.60	30.25	30.0	32
32.0	30.60	28.25	28.0	30
30.0	28.60	26.25	26.0	28
28.0	26.60	24.25	24.0	26
26.0	24.60	22.25	22.0	24
24.0	22.60	20.25	20.0	22
22.0	20.60	18.25	18.0	20
20.0	18.60	16.25	16.0	18
18.0	16.60	14.25	14.0	16
16.0	14.60	12.25	12.0	14
14.0	12.60	10.25	10.0	12
12.0	10.60	8.25	8.0	10
10.0	8.60	6.25	6.0	08
D	C	B	A	PIN

SPECIFICATIONS
 Applicable Wire: AWG#28~#22
 Rated voltage: 125V DC, AC
 Rated Current: 2A

Withstand voltage: 1000V AC/min.
 Working Temp : -25°C~+105°C
 Insulation resistance: $\geq 1000 \text{ M}\Omega$
 Contact resistance: $\leq 30 \text{ m}\Omega$

MATERIAL
 Insulator: PA9T (UL94V-0)
 Contact PIN: Brass
 Plating: Tin all over Nickel
 Packing: BAG

Part No. : AW2015R-2xNP

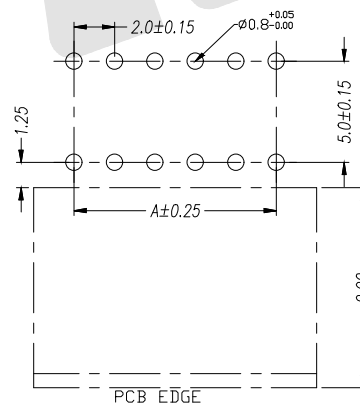


RECOMMEND PCB LAYOUT

Unless Otherwise specified tolerance
 X. ± 0.35 X.XX: ± 0.20
 X.X: ± 0.25 X.XXX: ± 0.15

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail: sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW: ZLA DATE: 25/04/2022
 CHECK: BobYang DATE: 25/04/2022

TITLE:
 2.00mm Pitch 90° Wafer Connector DIP Series



DRAWING NO: AW2015R-2xNP
 PRODUCT NO: AW2015R-2xNP

REV	DESCRIPTION			DATE
1	2	3	4	5