

HSF



**MATERIAL&FINISH**

Insulator:PBT Glass Fiber(UL94V-0)  
 contact:Brass  
 Contact:Gold-Plated Over Nickel  
**SPECIFICATIONS**  
 Current Rating:1A AC,DC  
 Voltage Rating:250V AC,DC  
 Temperature Range:-40℃ To+105℃  
 Contact Resistance:20mΩ Min  
 Insulation Resistance:1000MΩ Min  
 Withstanding Voltage:500V AC/Min

Ordering Code:

ECDF01 - X - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥

① Series No:

④ Color Insulator  
 B:Black  
 U:Blue  
 G:Grey

② No. of Contacts







10P 34P  
 14P 40P  
 16P 50P  
 20P 60P  
 26P 64P

⑤ Packing  
 A:Tray  
 B:Bag  
 C:Tube


③ Contact Plating

G0: Gold flash S0: Gold flash/Ni  
 G1: 3u" Gold S1: 3u" Gold/Ni  
 G2: 5u" Gold S2: 5u" Gold/Ni  
 G3: 10u" Gold S3: 10u" Gold/Ni  
 G4: 15u" Gold S4: 15u" Gold/Ni  
 G5: 30u" Gold S5: 30u" Gold/Ni  
 SN: Tin

⑥ SPECIAL FUNCTION  
 A:With Clapboard  
 B:Without Clapboard

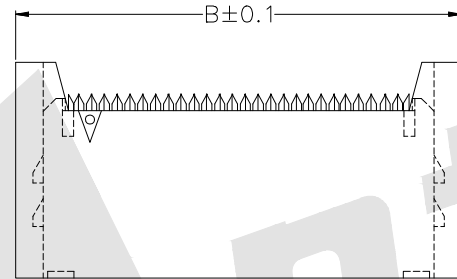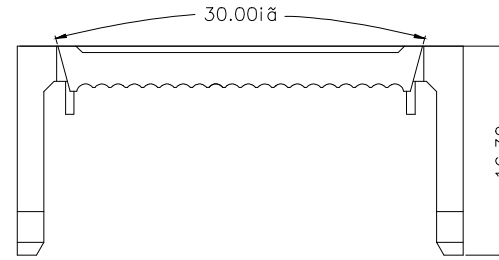

PART NO	DIM. A	DIM. B
10P	10.16	22.03
14P	15.24	27.10
16P	17.78	29.60
20P	22.86	34.80
26P	30.48	42.40
34P	40.64	52.60
40P	48.26	60.22
44P	53.34	65.30
50P	60.96	72.90
56P	68.58	80.54
60P	73.66	85.43
64P	78.74	90.51

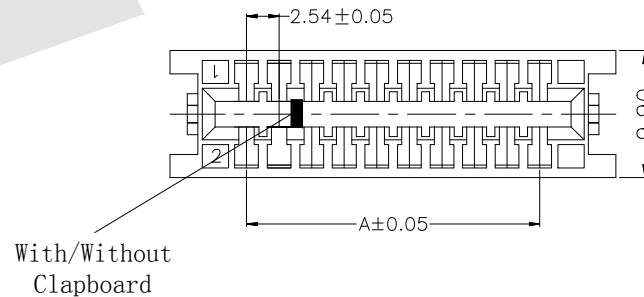


Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

**Antenk**® ANTENK ELECTRONICS CO.,LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm  
 DRAW Wu Feng Rong DATE 24/10/2020  
 CHECK BobYang DATE 24/10/2020

TITLE:  
 Edge Card IDC Type Tithout Mouting Ear 2.54mm



DRAWING NO: ECDF01-XXXXX  
 PRODUCT NO: ECDF01-XXXXX

REV	DESCRIPTION	DATE