

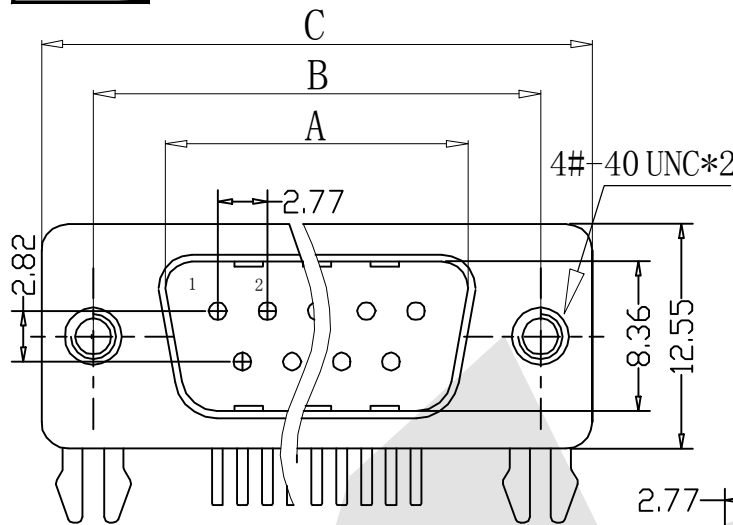
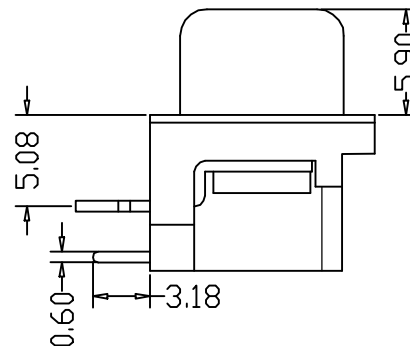
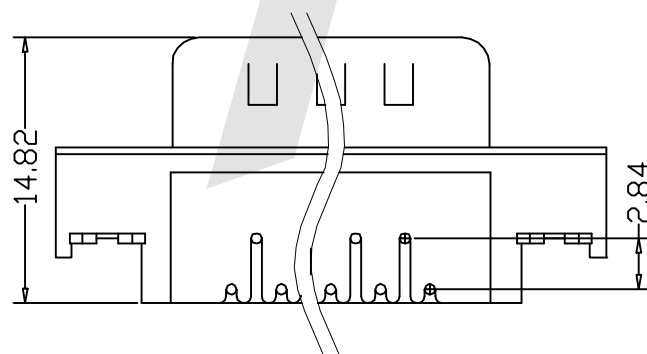


HSF

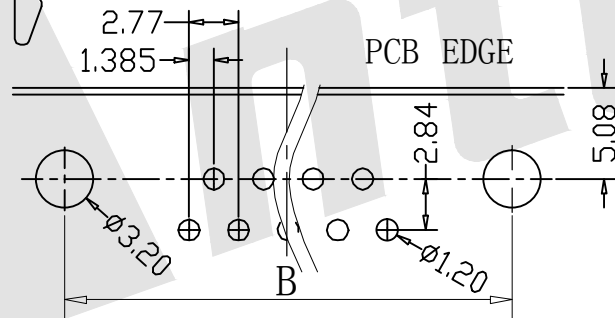

	09pin	15pin	25pin	37pin
A	16.92	25.25	38.96	55.42
B	24.99	33.32	47.04	63.50
C	30.80	39.10	53.00	69.30

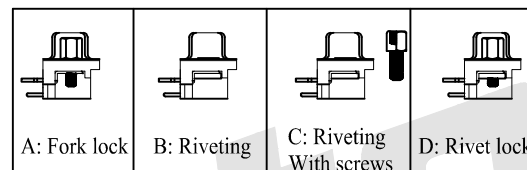

Material:
 Housing: Temperature Thermoplastics, PBT+G.F UL 94V-0
 Contact: Brass or Bronze
 Shell: 0.35T Steel Nickel Plating All Area
 Electrical Characteristics:
 Current Rating: 5A
 Contact Resistance: 15 milliohms Max
 Withstanding Voltage: 500V AC For 1 Minute
 Insulation Resistance: 1000 Megohms Min
 Operating Temperature: -55° C to +105° C

Ordering Code:
 DR02 - M - X - A - A - B - S
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Dual Row Angle DIP 5.08 Footprint
- ② Contact Type: M:Male
- ③ 09=09pin 15=15pin 25=25pin 37=37pin
- ④ Mounting Option: A: Fork lock B: Riveting C: Riveting With screws D: Rivet lock
- ⑤ Accessories: O:Non Accessories A: Zinc alloy 4.8mm Nickel A1:Zinc alloy 5.8mm Nickel B: Iron 4.8mm Nickel B1:Iron 5.8mm Nickel C: Copper alloy 4.8mm Nickel C1:Copper alloy 5.8mm Nickel D: Copper screw 4.8mm Nickel D1:Copper screw 5.8mm Nickel
- ⑥ Color Code: W:White L:Blue B:Black G:Grey
- ⑦ Contact Plating S: Selective Gold S1:Selective 3u" Gold S2:Selective 5u" Gold S3:Selective 10u" Gold S4:Selective 15u" Gold S5:Selective30u" Gold G0: Gold flash G1: 3u" Gold over G2: 5u" Gold over G3: 10u" Gold over G4: 15u" Gold over G5: 30u" Gold over

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 08/03/2019
CHECK BobYang	DATE 08/03/2019

TITLE: D-SUB PCB Male Dual Row Right Angle 5.08mm(stamped Pin)

DRAWING NO: DR02-MXAABS

PRODUCT NO: DR02-MXAABS



REV	DESCRIPTION	DATE