
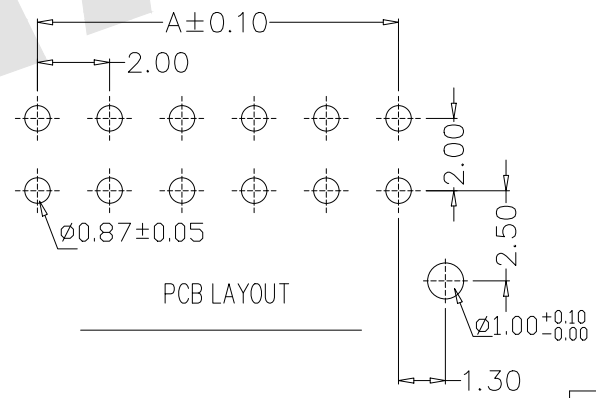
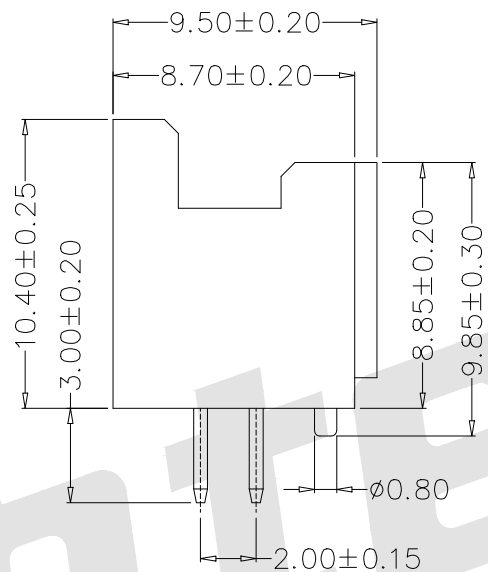
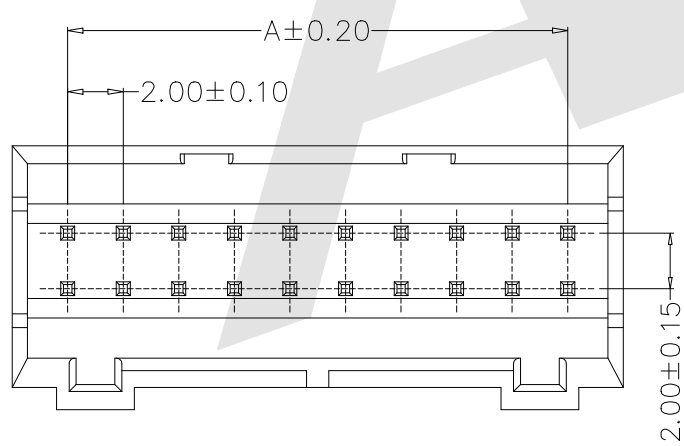


HSF

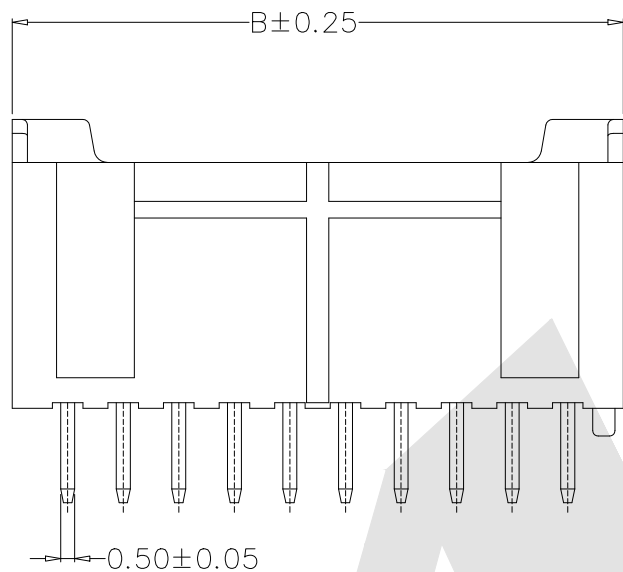

- SPECIFICATIONS**
1. Current Rating: 3A AC, DC
 2. Voltage Rating: 250V AC, DC
 3. Temperature Range: - 25°C~+85°C
 4. Contact Resistance: 20m Ω Max
 5. Insulation Resistance: 1000M Ω Min
 6. Withstanding Voltage: 800V AC/minute
 7. Material: Nylon66+ Fiber 25%,UL94V-0

Ordering Code:

AW2019V - 2xN - X - 01
 ① ② ③ ④

- ① Series No.
- ② Pins No.
See Table
- ③ Contact Plating
G0: Gold Flash S0: Gold Flash/Sn
G1: 3u" Gold S1: 3u" Gold/Sn
G2: 5u" Gold S2: 5u" Gold/Sn
G3: 10u" Gold S3: 10u" Gold/Sn
G4: 15u" Gold S4: 15u" Gold/Sn
G5: 30u" Gold S5: 30u" Gold/Sn
- ④ Serial No.

Pins	Dimension	
	A	B
2x02	2.00	6.00
2x03	4.00	8.00
2x04	6.00	10.00
2x05	8.00	12.00
2x06	10.00	14.00
2x07	12.00	16.00
2x08	14.00	18.00
2x09	16.00	20.00
2x10	18.00	22.00
2x11	20.00	24.00
2x12	22.00	26.00
2x20	38.00	42.00

Unless Otherwise specified tolerance
 X.±0.35 X.XX:±0.20
 X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 08/07/2023
 CHECK BobYang DATE 08/07/2023

VER./版本号 3rd ANGLE PROJECTION

Antenk ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: 2.0 Pitch SPH Series Dual Row 180° Wafer Connector
 DRAWING NO: AW2019V-2xN-X-01
 PRODUCT NO: AW2019V-2xN-X-01

MK/标记	DESCRIPTION/修订内容	DATE/日期(M/D/Y)
1	2	3