
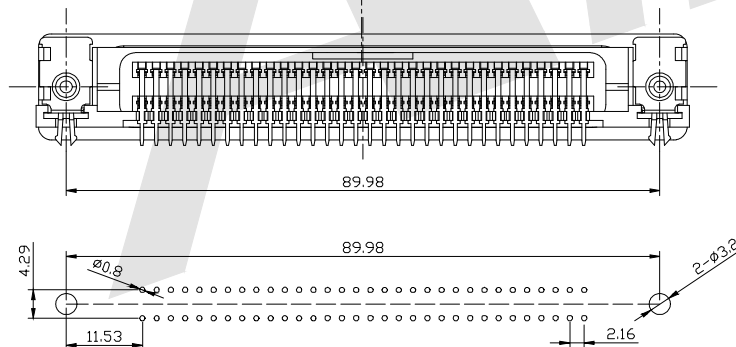

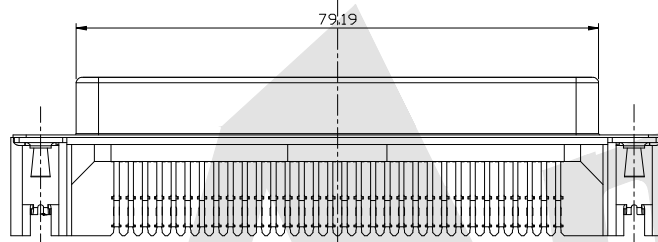


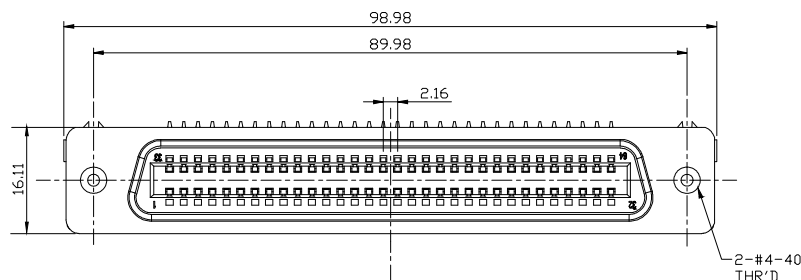

PCB Layout

Current Rating:5A

Dielectric Withstanding Voltage:1000V for one minute

Insulation Resistance:1000MΩ Min. (at 500V DC)

Contact Resistance:35mΩ Max.

Temperature:-55° C to +105° C

Material & Finish

1. SHELL:

Steel Zinc Plated, Tin Plated or Nickel Plated Steel

2. PIN CONTACT: Phosphor Bronze or Brass Gold Plated

3. INSULATOR:

PBT & Glass-Fibre Reinforced UL 94-V0

Ordering Code:

57CR - F - 64 - X - X - X - 03

① ② ③ ④ ⑤ ⑥

① CONTACT TYPE:

F:FEMALE

② NO. OF CONTACT:

64:64P

③ CONTACT PLATING:

A: GOLD FLASH

S: SELECTIVE GOLD PLATED 3U"

SA: SELECTIVE GOLD PLATED 5U"

SB: SELECTIVE GOLD PLATED 10U"

SC: SELECTIVE GOLD PLATED 15U"

SD: SELECTIVE GOLD PLATED 30U"

⑥ SERIES NUMBER: 03

④ INSULATOR COLOR:

B:BLUE K:BLACK W:WHITE

CONTACT LENGTH(MM)

⑤ A:2.6 B:2.7 C:2.8 D:3.0

E:3.2 F:4.75 O:N/A

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown

UNIT:
mm

DRAW
Wu Feng Rong

DATE
02/04/2021

CHECK
BobYang

DATE
00/04/2021



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE: 2.16mm 64P Centronic Right Angle
Female 64P With L Shape Plate

DRAWING NO: 57CR-F64XXX03

PRODUCT NO: 57CR-F64XXX03

REV	DESCRIPTION	DATE