
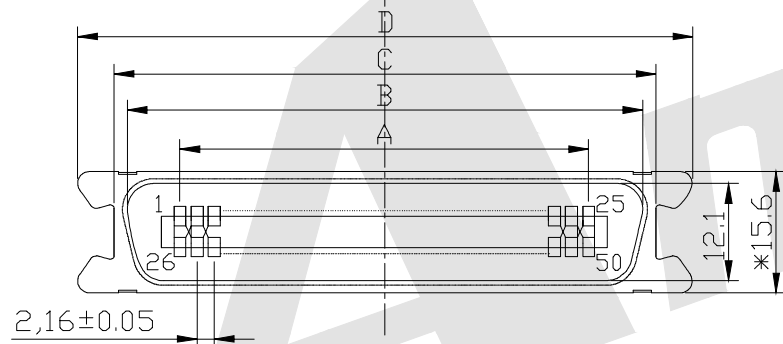



HSF

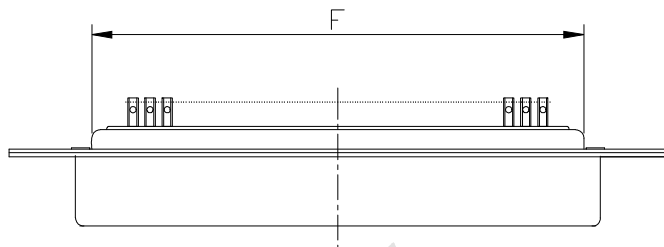

Positions	A	B	C	D	F	E
14	12.96	25.3	29.4	38.5	22.7	9.0
24	23.76	36.2	40.2	49.3	33.5	8.9
36	36.72	49.2	53.5	62.0	46.45	8.9
50	51.84	64.4	68.3	77.4	62.0	8.8

Current Rating:5A

Dielectric Withstanding Voltage:1000V for one minute

Insulation Resistance:1000MΩ Min. (at 500V DC)

Contact Resistance:25mΩ Max.

Temperature:-55° C to +105° C

Material & Finish

1. SHELL:

Steel Zinc Plated, Tin Plated or Nickel Plated Steel

2. PIN CONTACT: Phosphor Bronze or Brass Gold Plated

3. INSULATOR:

PBT & Glass-Fibre Reinforced UL 94-V0

Ordering Code:

57CC - M - X - X - X - 06

①	②	③	④	⑤
---	---	---	---	---

① CONTACT TYPE:

F:FEMALE

M:MALE

② NO. OF CONTACT:

14 24 36 50

④ INSULATOR COLOR:

B:BLUE

K:BLACK

W:WHITE

⑤ SERIES NUMBER:05

③ CONTACT PLATING:

A: GOLD FLASH

S: SELECTIVE GOLD PLATED 3U"

SA: SELECTIVE GOLD PLATED 5U"

SB: SELECTIVE GOLD PLATED 10U"

SC: SELECTIVE GOLD PLATED 15U"

SD: SELECTIVE GOLD PLATED 30U"


Unless Otherwise specified tolerance

X. ±0.35

X.XX: ±0.20

X.X: ±0.25

X.XXX: ±0.15

SCALE:
As ShownUNIT:
mmDRAW
Wu Feng RongDATE
02/24/2021CHECK
BobYangDATE
02/24/2021

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.comTITLE:
2.16mm CENTRONIC SOLDER CONNECTOR
MALE LATCH MD TYPE

DRAWING NO: 57CC-MXXX06

PRODUCT NO: 57CC-MXXX06

REV

DESCRIPTION

DATE