



SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 3A AC,DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -40°C~+105°C

Ordering information:
AW2508V-XP-H- **
1 2

WAFER





- Part NO: AW2508V-xP-H
- Material: Pin: Brass/Tin over Nickel
Insulator: Nylon 66, UL94V-0
- Mates with: AH2508 series Housing
- Color: Ivory

- 1.Part No.
2.Color:
- | | |
|---------------|-----------------|
| (blank)-Ivory | BR-Brown |
| BK-Black | GY-Gray |
| RD-Red | PK-Pink |
| BL-Blue | LY-Lemon yellow |
| YL-Yellow | P-Purple |
| GN-Green | LE-Light Blue |
| OR-Orange | FY-Vivid yellow |
| WH-White | |

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
AW2508V-2P-H	2.50	7.50
AW2508V-3P-H	5.00	10.00
AW2508V-4P-H	7.50	12.50
AW2508V-5P-H	10.00	15.00
AW2508V-6P-H	12.50	17.50
AW2508V-7P-H	15.00	20.00
AW2508V-8P-H	17.50	22.50
AW2508V-9P-H	20.00	25.00
AW2508V-10P-H	22.50	27.50
AW2508V-11P-H	25.00	30.00
AW2508V-12P-H	27.50	32.50
AW2508V-13P-H	30.00	35.00
AW2508V-14P-H	32.50	37.50
AW2508V-15P-H	35.00	40.00

Unit: mm

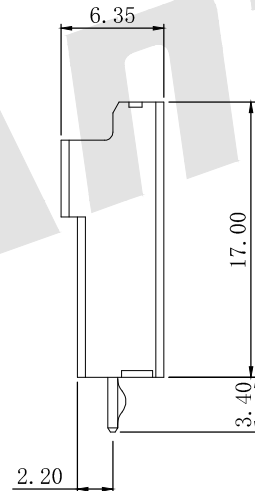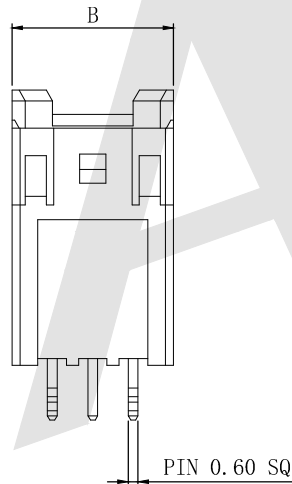


Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

Antenk ANTEK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 5/11/2018
CHECK Bob Yang	DATE 5/11/2018

TITLE: 2.50mm pitch 180° Wafer-High box type
Connector Series



DRAWING NO: AW2508V-xP-H

PRODUCT NO: AW2508V-xP-H

REV	DESCRIPTION	DATE
1		