

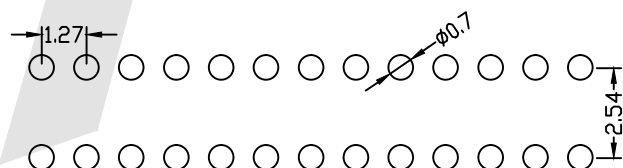



HSF

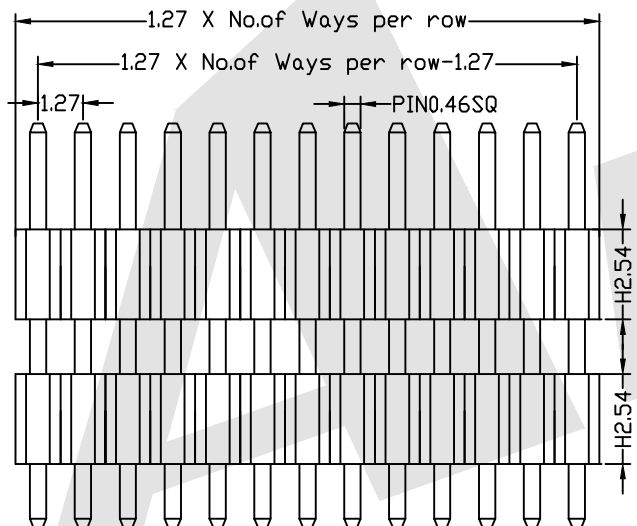

RoHS

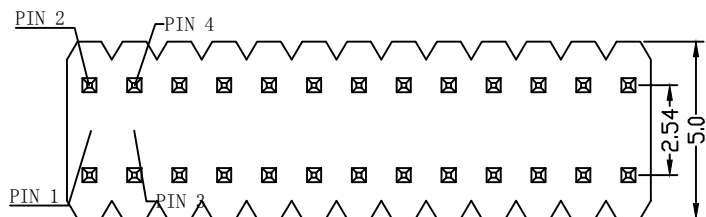

P. C. B LAYOUT

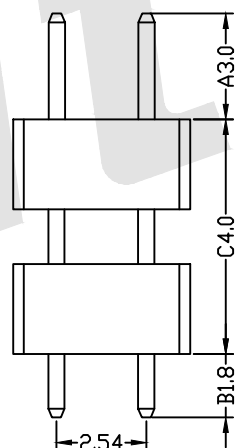

SPECIFICATIONS:

Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65° C to +125° C
Contact Material:	Brass
Insulator Material:	PA6T, UL94V-0, Black

Ordering Code:

PHCS11 - X - X - D - A-C-B - X - X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
② No. of Contacts:
02 To 100
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type:
D: Dual
⑤ Pin Length:
A: 0300=3.0mm
C: 0400=4.0mm
B: 0180=1.8mm
Please mark the desired length in the A/C/B
⑥ Insulator Material:
B: PA6T
C: LCP
E: PA9T
⑦ Packing:
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP

Standard IE P/N :

PHCS11-10-G0-D-0300-0400-0180-B-B

A	C	B	Unless Otherwise specified tolerance		ANTENK ELECTRONICS CO., LTD Http://www.antenk.com E-mail:sales@antenk.com
3.0	4.0	1.8	X. ±0.35	X. XX: ±0.20	
Optional			X. X: ±0.25	X. XXX: ±0.15	
			SCALE: As Shown	UNIT: mm	TITLE: 1.27X2.54 Pin Header Dual Row Double Plastic Straight Type
			DRAW YG ZHONG	DATE 12/11/2015	
			CHECK BobYang	DATE 12/11/2015	
Increase packing method and material			2016/10/25		DRAWING NO: PHCS11-XXD-0300-0300-0180-XX
REV	DESCRIPTION		DATE		PRODUCT NO: PHCS11-XXD-0300-0300-0180-XX

