

HSF



ROHS

SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 3A AC,DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -40°C~+105°C



WAFER

- Part NO: AW2507R-xP
- Material: Pin: Brass/Tin over Nickel
Insulator: Nylon 66, UL94V-0
- Mates with: AH2507 series Housing
- Color: Brown

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
AW2507R-2P	2.50	5.00
AW2507R-3P	5.00	7.50
AW2507R-4P	7.50	10.00
AW2507R-5P	10.00	12.50
AW2507R-6P	12.50	15.00
AW2507R-7P	15.00	17.50
AW2507R-8P	17.50	20.00
AW2507R-9P	20.00	22.50
AW2507R-10P	22.50	25.00
AW2507R-11P	25.00	27.50
AW2507R-12P	27.50	30.00
AW2507R-13P	30.00	32.50
AW2507R-14P	32.50	35.00
AW2507R-15P	35.00	37.50

Unit: mm

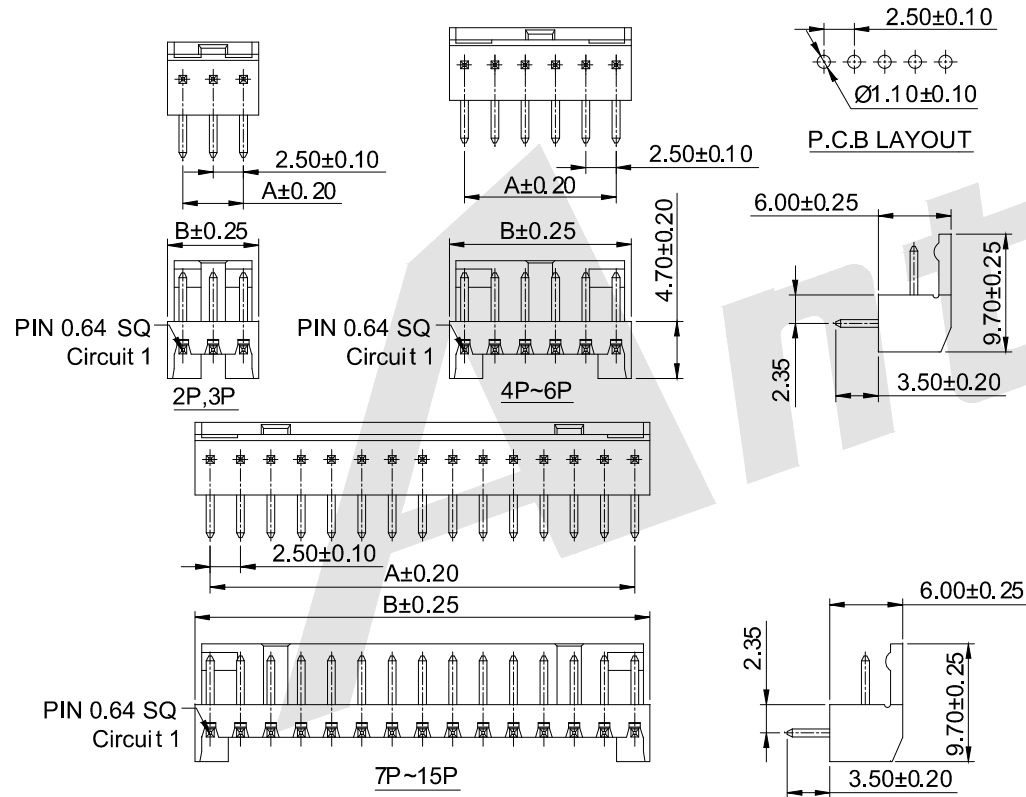


Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15



ANTENK ELECTRONICS CO.,LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 5/6/2018
CHECK Bob Yang	DATE 5/6/2018

TITLE: 2.50mm pitch 90° Wafer Connector Series



DRAWING NO: AW2507R-xP

PRODUCT NO: AW2507R-xP

REV	DESCRIPTION	DATE