

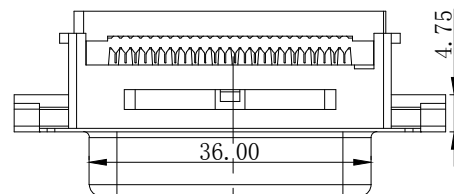
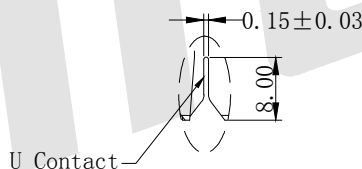
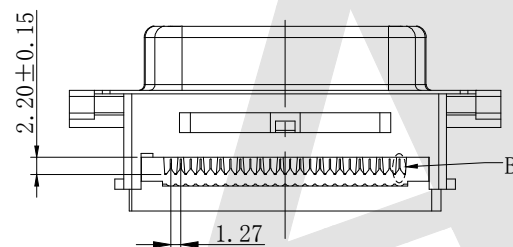

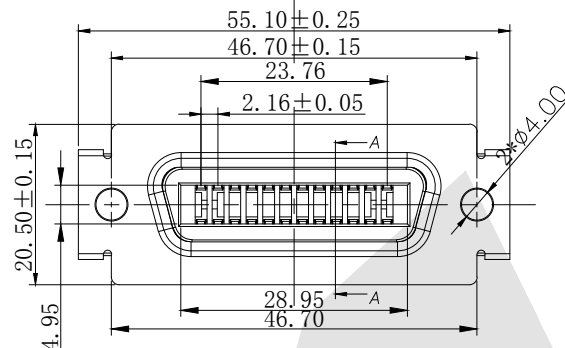


HSF

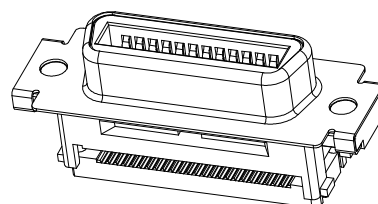

SECTION:A-A

Detail B
Scale:4:1

3D VIEW

NOTE:

- A. HOUSING: PBT 25%G/F BLACK, UL 94V-0 RATED.
B. COVER: PBT 25%G/F BLACK, UL 94V-0 RATED.
C. CONTACTS: C2680 T=0.30mm 30U"AU PLATING
ON CONTACT AREA, 100U"NI PLATING ON AREA
D. SHELL: SPCC, NICKEL PLATED.
E. HARPOON: COPPER ALLOY, TIN OVER NICKEL

2. SPECIFICATION:

- A. CONTACT RESISTANCE: 30mΩ Max
B. INSULATION RESISTANCE: 1000MΩ MIN 500V/DC
C. DIELECTRIC WITHSTANDING VOLTAGE: 1000V DC /1 MINUTE.
D. OPERATING TEMPERATURE: -55°C to +105°C ⚠

Ordering Code:

57CI - F - 24 - SD - K - E
① ② ③ ④ ⑤

- ① CONTACT TYPE:
F:FEMALE
M:MALE

- ② NO. OF CONTACT:
24

- ③ CONTACT PLATING:

A: GOLD FLASH
S: SELECTIVE GOLD PLATED 3U"
SA: SELECTIVE GOLD PLATED 5U"
SB: SELECTIVE GOLD PLATED 10U"
SC: SELECTIVE GOLD PLATED 15U"
SD: SELECTIVE GOLD PLATED 30U"

- ④ INSULATOR COLOR:
K:BLACK

- ⑤ MOUNTING TYPE(OPTION)
E: Thought Hole
Without Nut Hole ID:4.00mm

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown
DRAW
Wu Feng Rong
CHECK
BobYang

UNIT:
mm
DATE
04/08/2020
DATE
04/08/2020



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 57-24F Stamped Pin B TYPE Thought
Hole Without Nut Hole ID:4.00MM

DRAWING NO: 57CI-F24SDKE

PRODUCT NO: 57CI-F24SDKE

⚠ Update Ordering Code

04/21/2021

⚠ Update OPERATING TEMPERATURE

03/29/2021

⚠ Update Specification

02/05/2021

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8