
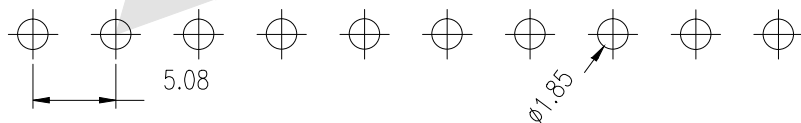

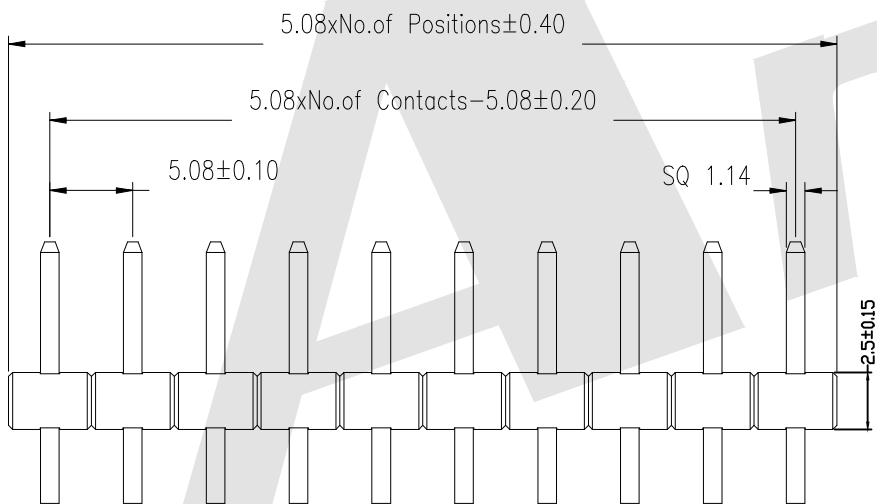


HSF

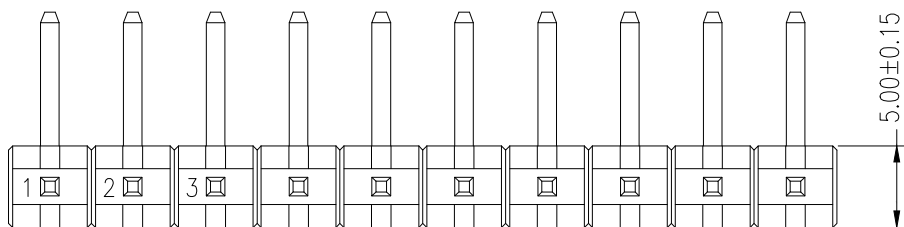

SPECIFICATION

Current Rating: 7 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: LCP,UL 94V-0 Black

Ordering Code:

PHGR01A - X - X - S - A-D-B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
01 To 40
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN: Tin
- ④ Connector Type
S: Single
- ⑤ Pin Length:
A:0800=8.00mm
D:0690=6.90mm
B:0360=3.60mm
Please mark the desired length in the A/D/B
- ⑥ Insulator Material
B:PA6T
C:LCP
E:PA9T
- ⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Standard IE P/N : PHGR01A-10-G0-S-0800-0690-0360-C-B

A	D	B	Unless Otherwise specified tolerance	
8.0	6.9	3.6	X. ±0.35	X.XX: ±0.20
			X.X: ±0.25	X.XXX: ±0.15




ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

Optional	SCALE: As Shown	UNIT: mm
	DRAW TMX	DATE 11/20/2021
	CHECK BobYang	DATE 11/20/2021

TITLE: 5.08 mm Pin Header Single Row
 AngleType, standard type

DRAWING NO: PHGR01A-XXS-0800-0690-0360-XX

PRODUCT NO: PHGR01A-XXS-0800-0690-0360-XX



REV	DESCRIPTION				DATE			
1	2	3	4	5	6	7	8	