






HSF





ROHS

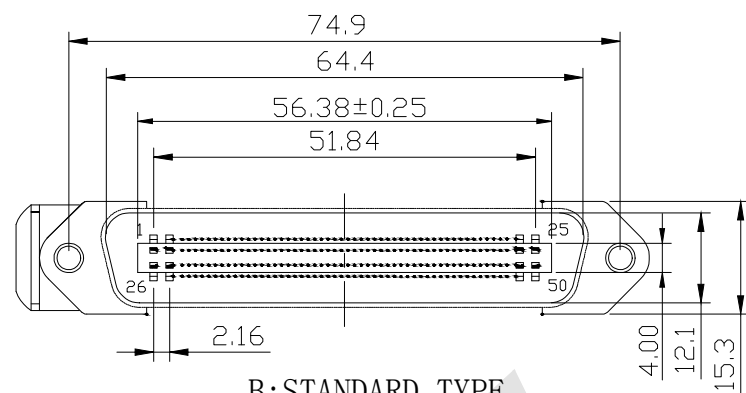

B: STANDARD TYPE

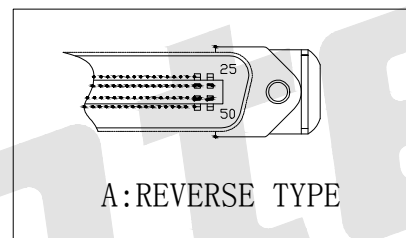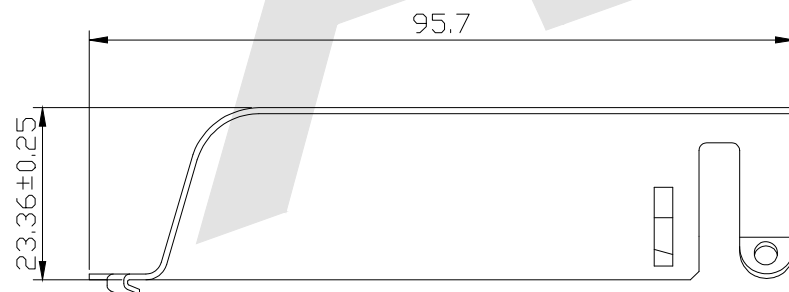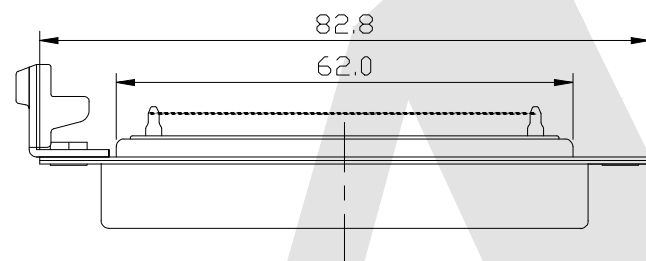

A: REVERSE TYPE

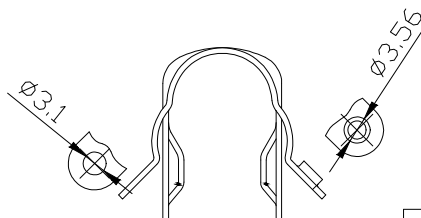

Current Rating:5A  
Dielectric Withstanding Voltage:1000V for one minute  
Insulation Resistance:1000M $\Omega$  Min. (at 500V DC)  
Contact Resistance:25m $\Omega$  Max.  
Temperature:-55° C to +105° C

## Material &amp; Finish

1. SHELL:  
Steel Zinc Plated, Tin Plated or Nickel Plated Steel
2. PIN CONTACT: Phosphor Bronze or Brass Gold Plated
3. INSULATOR:  
PBT & Glass-Fibre Reinforced UL 94-V0

## Ordering Code:


57CC - M - X - X - X - X - 02  
① ② ③ ④ ⑤ ⑥

- |                                                                                                                                                                                                            |                                                        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| ① CONTACT TYPE:<br>F:FEMALE<br>M:MALE                                                                                                                                                                      | ④ INSULATOR COLOR:<br>B:BLUE<br>K:BLACK                |
| ② NO. OF CONTACT:<br>14 24 36 50                                                                                                                                                                           | ⑤ DIRECTION TYPE:<br>A:REVERSE TYPE<br>B:STANDARD TYPE |
| ③ CONTACT PLATING:<br>A: GOLD FLASH<br>S: SELECTIVE GOLD PLATED 3U"<br>SA: SELECTIVE GOLD PLATED 5U"<br>SB: SELECTIVE GOLD PLATED 10U"<br>SC: SELECTIVE GOLD PLATED 15U"<br>SD: SELECTIVE GOLD PLATED 30U" | ⑥ SERIES NUMBER:02                                     |

Unless Otherwise specified tolerance  
X.  $\pm 0.35$  X.XX:  $\pm 0.20$   
X.X:  $\pm 0.25$  X.XXX:  $\pm 0.15$

SCALE:  
As Shown  
DRAW  
Wu Feng Rong  
CHECK  
BobYang

UNIT:  
mm  
DATE  
02/24/2021  
DATE  
02/24/2021



**Antenk**® ANTENK ELECTRONICS CO., LTD  
Http://www.antenk.com  
E-mail:sales@antenk.com

TITLE:  
2.16mm CENTRONIC LOW PROFILE MALE SOLDER &  
70500 METAL SHELL SIMPLIFIED STYLE

DRAWING NO: 57CC-MXXXX02

PRODUCT NO: 57CC-MXXXX02

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8