


HSF



ROHS

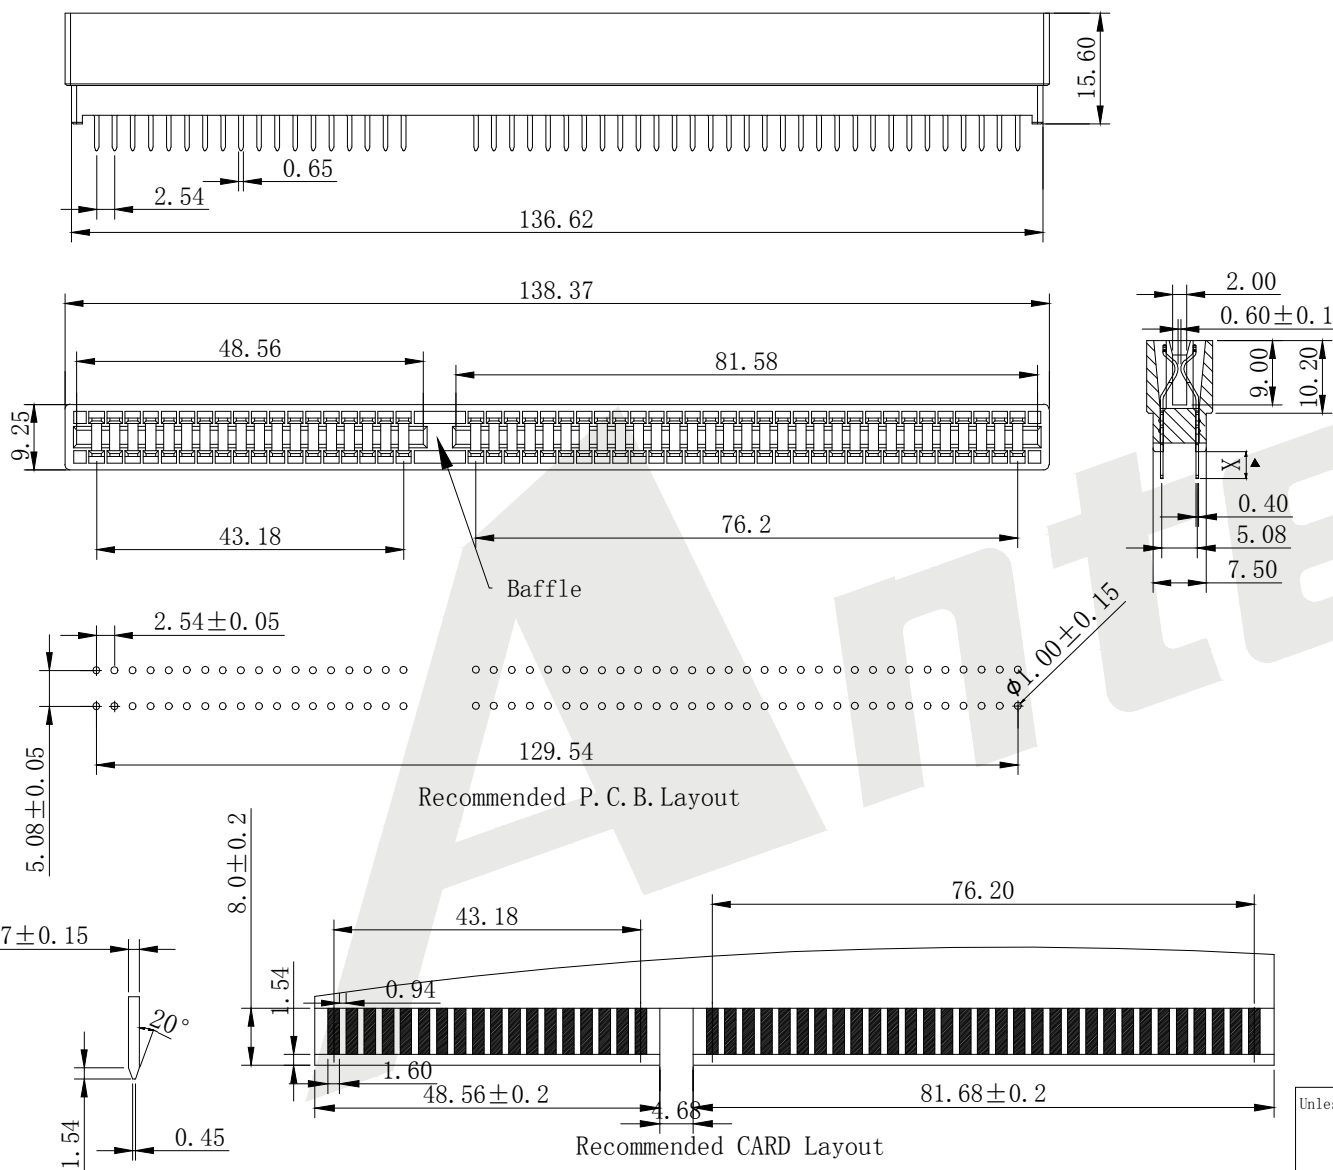

SPECIFICATION

1. CURRENT RATING:3AMP
2. DIELECTRIC WITHSTANDING VOLTAGE:1000V AC RMS 60Hz. 1MIN
3. CONTACT RESISTANCE:20 MILLIOHMS MAX
4. INSULATION RESISTANCE:5000 MEGOHMS MIN. At 500V DC
5. OPERATION TEMPERATURE:-55° C TO +105° C
6. INSERTION FORCE:0.4Kgf MAX. Per Pair
Withdrawal Force:0.25Kgf Mac. Per Pair
Insulator:PBT+G.F. (UL94V-0)
- CONTACT:BRASS OF PHOSPHOR BRONZE GOLD PLATED ON CONTACT AREA
TIN PLATED ON SOLDER TAILS, OVER NICKEL

Order code:

ECCS - A - B - X - S0 - P - B - 05
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① SERIES NO:ECCS ⑥ Plastic Materials:
A=98P P:PBT
- ② Number of Pins:A
A=98P
- ③ Pitch:B:2.54MM ⑦ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
- ④ DIP Length:X
A:1.8MM
B:3.8MM Standard
C:6.3MM D:13.8MM
- ⑤ Contact Plating
G0:Gold flash ⑧ Product NO.:05
S0: Gold flash/Ni
G1: 3U" Gold
G2: 5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
SN:Tin


Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown UNIT:
mm

DRAW
Wu Feng Rong DATE
06/11/2020

CHECK
BobYang DATE
06/11/2020



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

2.54mm 98P Slot Straight DIP With Baffle Connectors

DRAWING NO: ECCS-ABXSOPB05

PRODUCT NO: ECCS-ABXSOPB05

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8