


RECOMMENDED PCB LAYOUT THICKNESS=1.6mm
TOLERANCE:±0.05

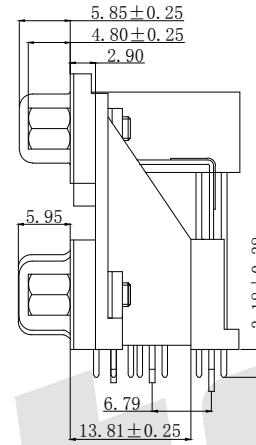

NOTE:

- MATERIALS AND FINISHED
INSULATOR : PBT+30% GF UL 94V-0,
SHELL : STEEL, NI FINISHED
CONTACT MATERIAL:BRASS, SELEVITE GOLD FINISHED
HARPOON:BRASS, SN FINISHED
RIVET: COPPER ALLOY ,NI FINISHED
WITH #4-40 THREADED ASSEMBLED
- ELECTRICAL CHARACTERISTICS
CURRENT RATING : 1.0 AMP DC
VOLTAGE RATING: 300 V DC
CONTACT RESISTANCE :20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
DURABILITY: 600 CYCLES
- ENVIRONMENTAL
OPERATING TEMPERATURE: -55° C ~ +85° C
STORAGE TEMPERATURE: -55° C ~ +105° C

4. HOW TO ORDER:

Ordering Code:

DDRO3A - C - X - X - X

- ① ② ③ ④ ⑤

- Triple port Angle DIP
- Contact NO :
C:25P Female TO 9P Male+HDR 15P Female
- Other Option:
C:Riveted Ground Hooks
with #4-40UNC Open
S1:Riveted Ground Hooks Pre-Loaded #4-40UNC
Hex screws 4.8mm
S2:Piveted Ground Hooks Pre-Loaded #4-40UNC
Hex screws 5.8mm
- Color Code:
B:Black L:Blue W:White G:Grey
- Contact Plating
S: Selective Gold S1:Selective 3u" Gold
S2:Selective 5u" Gold S3:Selective 10u" Gold
S4:Selective 15u" Gold S5:Selective 30u" Gold
G0: Gold flash G1: 3u" Gold over
G2: 5u" Gold over G3: 10u" Gold over
G4: 15u" Gold over G5: 30u" Gold over

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15


SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 06/08/2019
CHECK BobYang	DATE 06/09/2019

Antenk® ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: D-SUB P.C.B Triple port Right Angle
25F TO DR 9M+HDR 15F 3.08 (stamped Pin)

DRAWING NO: DDRO3A-CXXX

PRODUCT NO: DDRO3A-CXXX



Revise code number S1,S2 option

2019.08.06

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8