

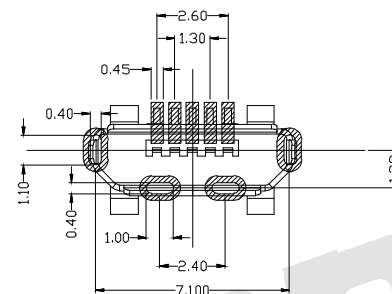
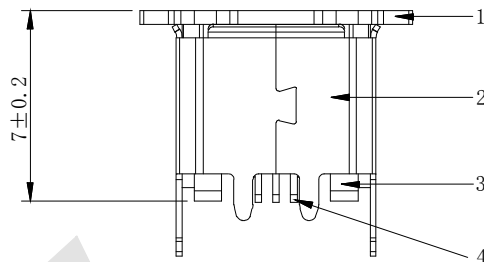


HSF

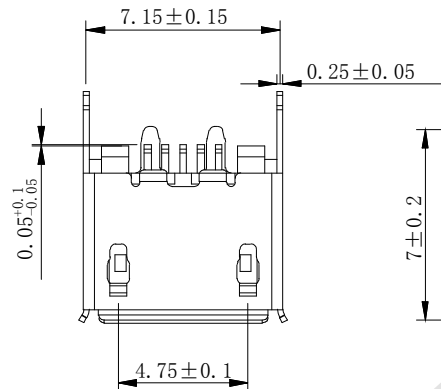

BOM: RECOMMENDED PCB LAYOUT

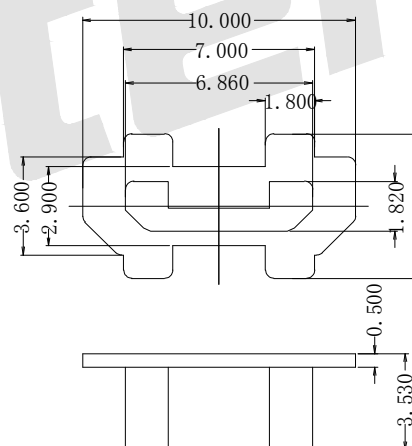



SPECIFICATIONS:

- 1.1 Current Rating:1A Max
- 1.2 Withstanding Voltage:100V(ac) for 1min
- 1.3 Contact Resistance:50mΩ Max
- 1.4 Insulation Resistance:100MΩ Min
- 1.5 Total Mating Force:3.57kgf Max
- 1.6 Total Unmating Force:1.00kgf Min
- 0.81~2.05Kgf Min
- Durability:10000 Cycles
- 1.7 Operating Tempreture:-30° C +80° C
- 1.8 Sticky reel packing

Order code:


MUFM47 - $\frac{X}{①}$ - $\frac{X}{②}$ - $\frac{X}{③}$ - $\frac{X}{④}$ - $\frac{X}{⑤}$ - $\frac{X}{⑥}$

- ① Series NO:
- ② Shell Material:
B:Brass I:Iron
S:stainless steel
- ③ Insulator Material:
P:PBT+30%GF
L:LCP
- ④ Contact Material:
B:Brass
P:phosphor copper
- ⑤ Contact Plating
G0:Gold flash
G1: 3U" Gold
G2: 5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
- ⑥ Packing
A:Tray
B:Bag
C:Tube
D:Tape & Reel+Cap

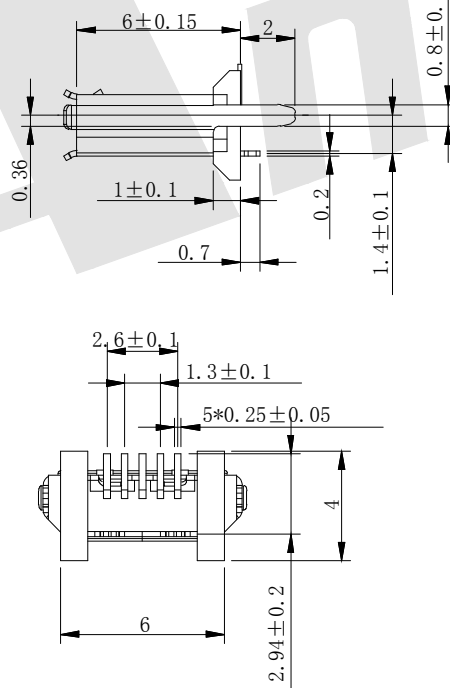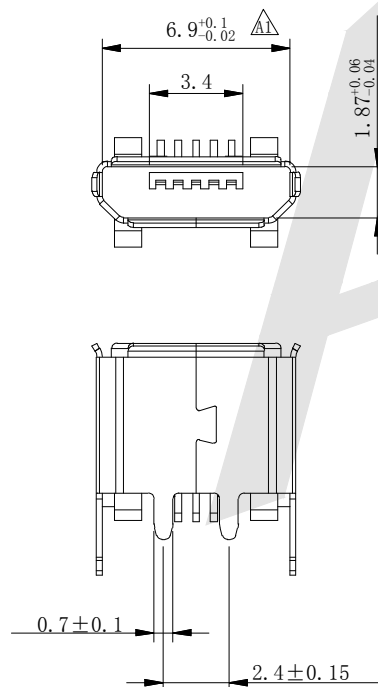

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown
DRAW
Lv Xun Hua
CHECK
BobYang



UNIT:
mm
DATE
2019.06.03
DATE
2019.06.03

Antenk® ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: MICRO USB 5P B Type female type right angle DIP 7.1mm

DRAWING NO: MUFM47-XXXXX

PRODUCT NO: MUFM47-XXXXX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8