



HSF



ROHS



### SPECIFICATION

1. MATERIAL:

HOUSING: THERMOPLASTIC UL 94V-0  
 COLOR: BLACK  
 CONTACT: COPPER ALLOY T=0.2mm  
 SHELL: STAINLESS STEEL T=0.2mm

2. ELECTRICAL CHARACTERISTIC:

RATED CURRENT (MAX): 0.3A  
 RATED VOLTAGE (MAX): 30V AC  
 CONTACT RESISTANCE: 50MILLIOHMS MAXIMUM INITIAL  
 INSULATION RESISTANCE: 100MEGOHMS MINIMUM  
 DIELECTRIC WITH STANDING VOLTAGE: 100V AC AT SEALEVEL

Ordering Code:

MUMS02 - X - L - X - X - X  
 ① ② ③ ④ ⑤ ⑥

① Series No:

② Shell Material:

B: Brass  
 S: stainless steel

③ Insulator Material:

P: PBT+30%GF  
 L: LCP

④ Contact Material:


B: Brass  
 P: phosphor copper

⑤ Contact Plating

G0: Gold flash  
 G1: 3u" Gold  
 G2: 5u" Gold  
 G3: 10u" Gold  
 G4: 15u" Gold  
 G5: 30u" Gold

⑥ Packing

A: Tray  
 B: Bag  
 C: Tube  
 D: Tape & Reel

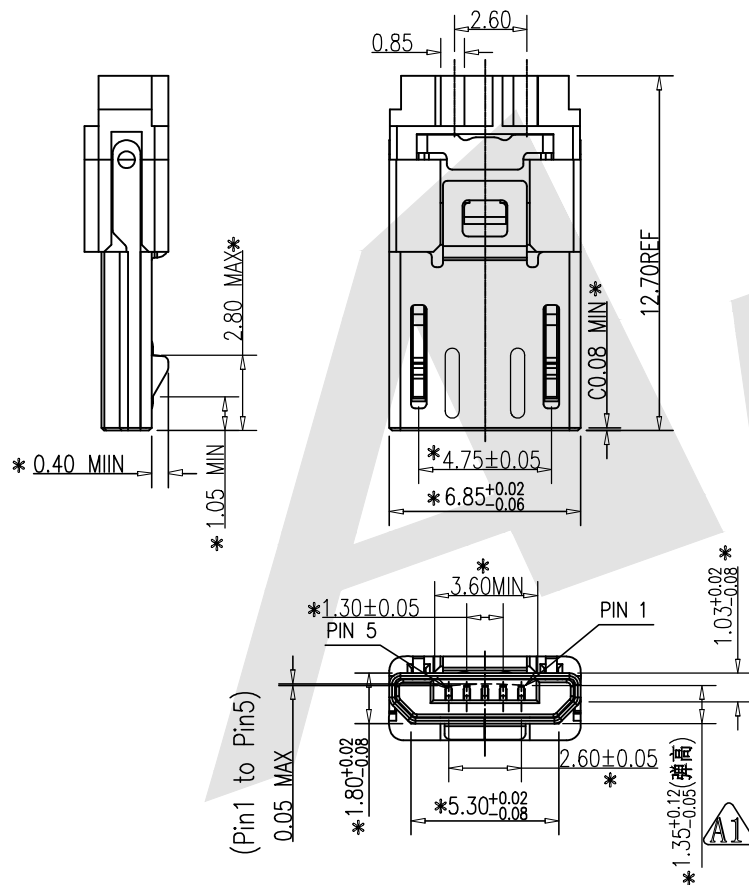

CONTACT NUMBER	SIGNAL NAME
PIN 1	D-
PIN 2	Short Circuit
PIN 3	
PIN 4	
PIN 5	D+

ORDBRING INFORMATION

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm  
 DRAW Lv Xun Hua DATE 05/06/2019  
 CHECK BobYang DATE 05/06/2019



**Antenk**® ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail: sales@antenk.com

TITLE:  
 Micro USB 5P Plug solder Front Five Rear Two

DRAWING NO: MUMS02-XXXXX

PRODUCT NO: MUMS02-XXXXX

REV	DESCRIPTION	DATE