


HSF



ROHS

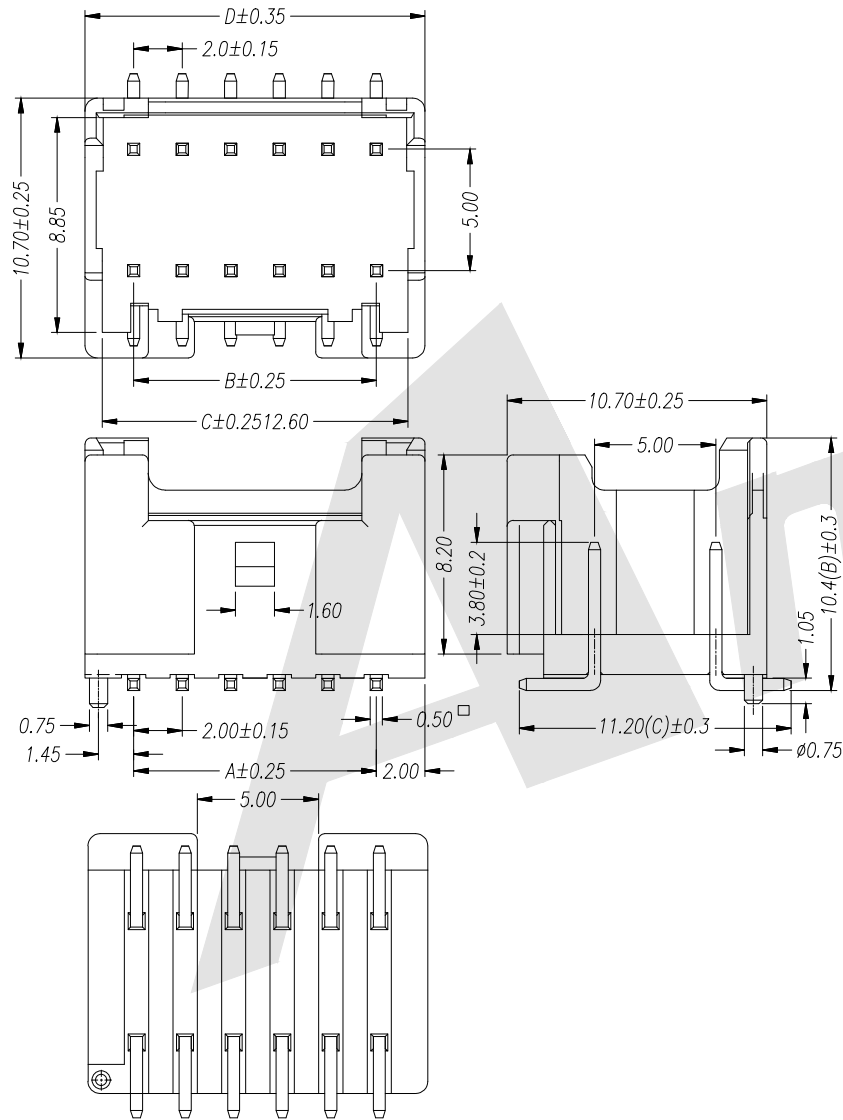

44.0	42.60	40.25	40.0	42
42.0	40.60	38.25	38.0	40
40.0	38.60	36.25	36.0	38
38.0	36.60	34.25	34.0	36
36.0	34.60	32.25	32.0	34
34.0	32.60	30.25	30.0	32
32.0	30.60	28.25	28.0	30
30.0	28.60	26.25	26.0	28
28.0	26.60	24.25	24.0	26
26.0	24.60	22.25	22.0	24
24.0	22.60	20.25	20.0	22
22.0	20.60	18.25	18.0	20
20.0	18.60	16.25	16.0	18
18.0	16.60	14.25	14.0	16
16.0	14.60	12.25	12.0	14
14.0	12.60	10.25	10.0	12
12.0	10.60	8.25	8.0	10
10.0	8.60	6.25	6.0	08
D	C	B	A	PIN

SPECIFICATIONS

Applicable Wire: AWG#28~#22

Rated voltage: 125V DC, AC

Rated Current: 2A

Withstand voltage: 1000V AC/min.

Working Temp: $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Insulation resistance: $\geq 1000 \text{ M}\Omega$

Contact resistance: $\leq 30 \text{ m}\Omega$

MATERIAL


Insulator: PA9T (UL94V-0)

Contact PIN: Brass

Plating: Tin all over Nickel

Packing: BAG

Part No.: AW2015M-2xNP

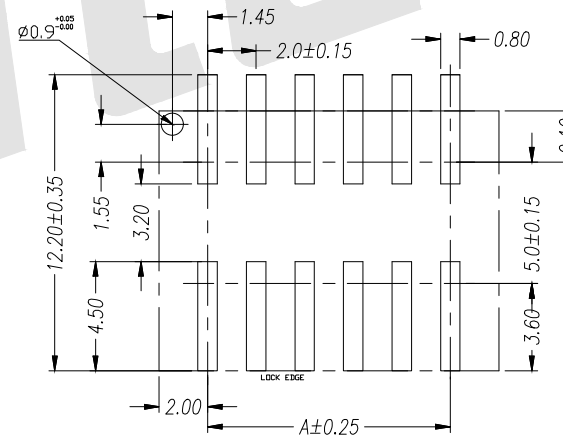

RECOMMEND PCB LAYOUT

Unless Otherwise specified tolerance


X. ± 0.35 X.XX: ± 0.20

X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm

DRAW ZLA DATE 25/04/2022

CHECK BobYang DATE 25/04/2022



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail: sales@antenk.com

TITLE:

2.00mm Pitch SMT Wafer Connector Series

DRAWING NO: AW2015M-2xNP

PRODUCT NO: AW2015M-2xNP

REV DESCRIPTION

DATE

1

2

3

4

5

6

7

8