







HSF

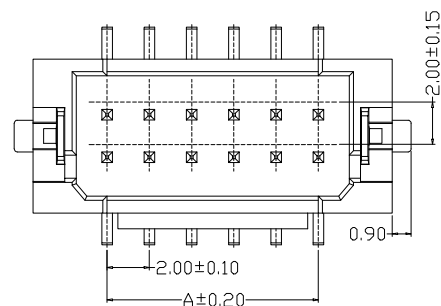

SPECIFICATIONS

- 1. Current Rating: 3A AC, DC
- 2. Voltage Rating: 250V AC, DC
- 3. Temperature Range: 25°C~+85°C
- 4. Contact Resistance: 20mΩ Max
- 5. Insulation Resistance: 1000MΩ Min
- 6. Withstanding Voltage: 800V AC/minute
- 7. Material :

Housing: LCP, UL94V-0
PIN: Brass, Tin-plated

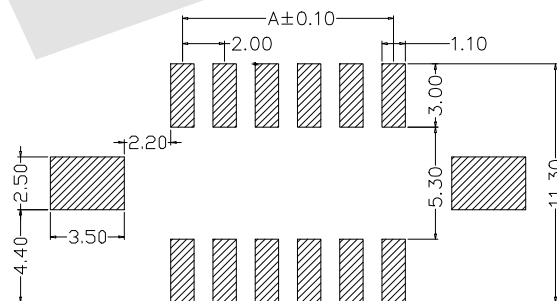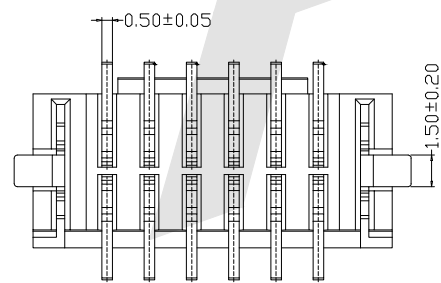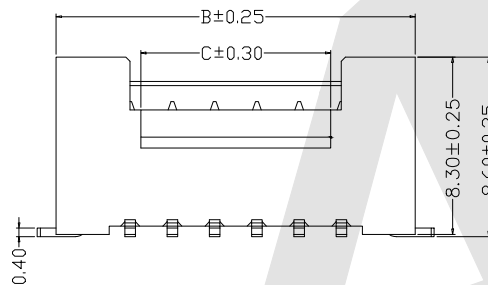

PCB LAYOUT

Part No.	Dimension(mm)		
	A	B	C
AW2008VM-2*2P	2.00	9.00	3.00
AW2008VM-2*3P	4.00	11.00	3.00
AW2008VM-2*4P	6.00	13.00	3.00
AW2008VM-2*5P	8.00	15.00	5.00
AW2008VM-2*6P	10.00	17.00	7.00
AW2008VM-2*7P	12.00	19.00	9.00
AW2008VM-2*8P	14.00	21.00	11.00
AW2008VM-2*9P	16.00	23.00	13.00
AW2008VM-2*10P	18.00	25.00	15.00
AW2008VM-2*11P	20.00	27.00	17.00
AW2008VM-2*12P	22.00	29.00	19.00
AW2008VM-2*13P	24.00	31.00	21.00
AW2008VM-2*14P	26.00	33.00	23.00
AW2008VM-2*18P	34.00	41.00	31.00
AW2008VM-2*20P	38.00	45.00	35.00

Unless Otherwise specified tolerance
X.X±0.35 X.XX±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
DRAW ZLA DATE 06/13/2023
CHECK BobYang DATE 06/13/2023

VER./版本号 3rd ANGLE PROJECTION

Antenk ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 2.0mm Pitch Dual Row 180° SMT With Board Lock Wafer Connector

DRAWING NO: AW2008VM-2xNP

PRODUCT NO: AW2008VM-2xNP

MK/标记

DESCRIPTION/修订内容

DATE/日期(M/D/Y)