



HSF



ROHS

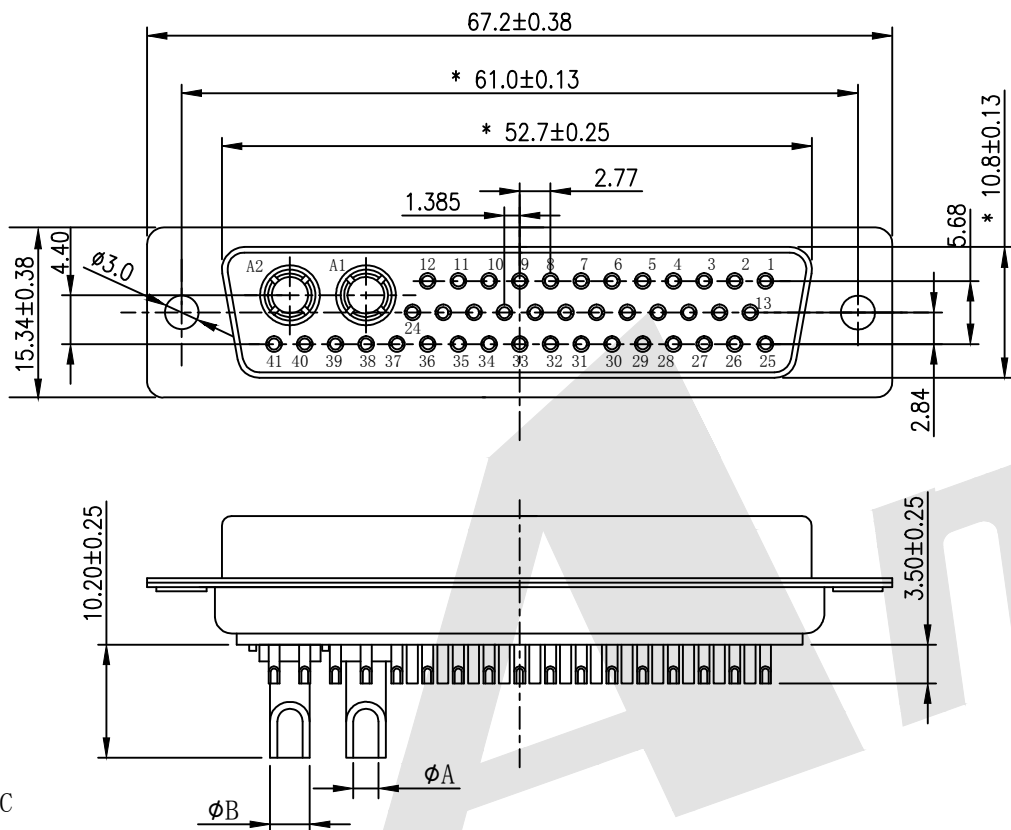

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE:	5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING:	1,000 VAC r.m.s.
OPERATING TEMPERATURE:	-55℃~+125℃
CONTACT RESISTANCE:	30 MILLIOHMS Max.
POWER PINS:	SEE PART No. BELOW
SIGNAL PINS:	3AMPS

MECHANICAL:

CONTACT INSERTION FORCE:	4.5kg Max
CONTACT SEPARATOR FORCE:	0.3kg Min

MATERIALS:

CONTACTS:	BRASS
INSULATOR:	PBT UL94V-0 RATED, 230℃ PROCESS TEMP.
SHELL:	STEEL

FINISH:

SHELL:

NICKEL

Ordering Code:


PDB43W2	- F	-G0	-B	-20
①	②	③	④	⑤

- ① Series
- ② Contact Type:
M:Male F:Female
- ③ Contact NO. :
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold
- ④ Insulation Color Code:
B:Black L:Blue
W:White
- ⑤ Power AMP:
10 = 10AMPS; 20 = 20AMPS;
30 = 30AMPS; 40 = 40AMPS;

40 AMPS	φ4.6	φ5.5
30 AMPS	φ3.4	φ4.4
20 AMPS	φ2.6	φ3.6
10 AMPS	φ1.75	φ2.54
Current Rating	φA	φB
	Dimension	

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 27/05/2019
CHECK BobYang	DATE 27/05/2019



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

43W2 Female SOLDER TYPE

DRAWING NO: PDB43W2-FXXX

PRODUCT NO: PDB43W2-FXXX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8