
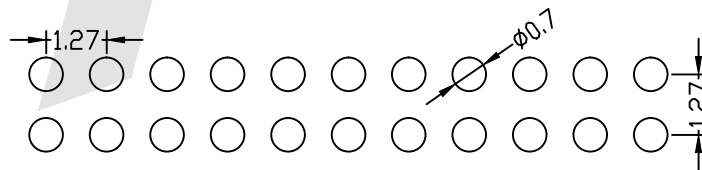
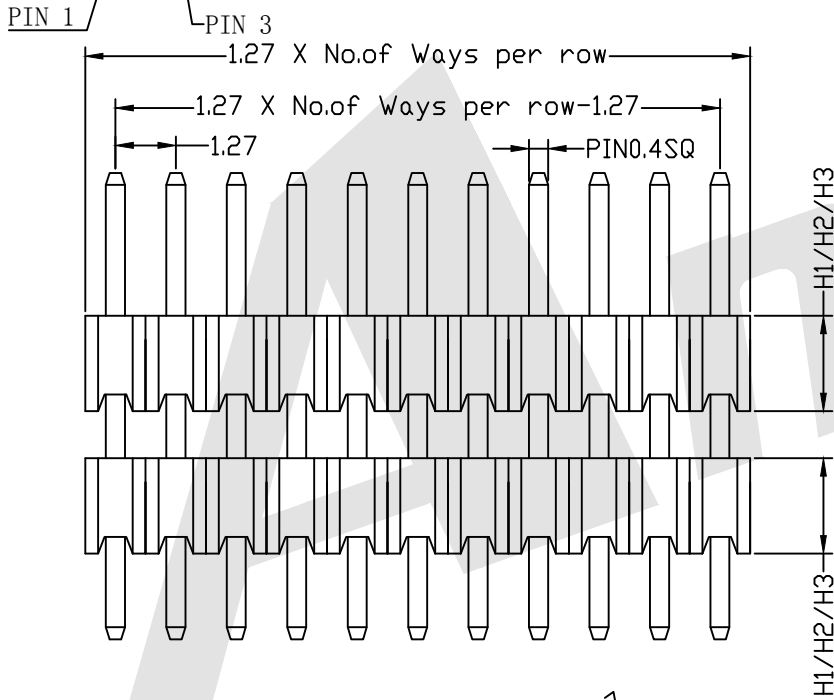


HSF

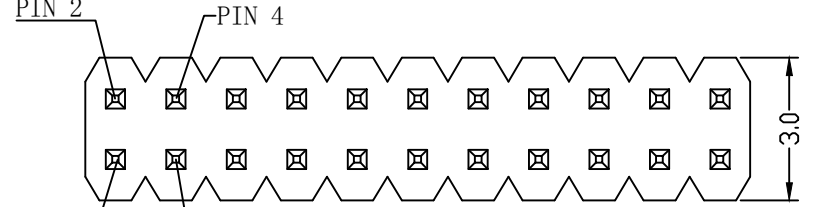

P. C. B LAYOUT

SPECIFICATIONS:

Current Rating: 1Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL94V-0, Black

Ordering Code:

PHCS08 - X - X - D - A-C-B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧


- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type:
 D: Dual
- ⑤ Pin Length:
 A: 0300=3.00mm
 C: 0500=5.00mm
 B: 0180=1.80mm
 Please mark the desired length in the A/C/B
- ⑥ Insulator Material:
 B:PA6T
 C:LCP
 E:PA9T
- ⑦ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP
- ⑧ Plastic High:
 H1:1.6mm
 H2:2.0mm
 H3:2.5mm

Standard IE P/N :

PHCS08-10-G0-D-0300-0500-0180-B-B-H2

A	C	B	Unless Otherwise specified tolerance	
3.0	5.0	1.8	X. XX: ±0.20	X. XXX: ±0.15
Optional			SCALE: As Shown	UNIT: mm

DRAW YG ZHONG DATE 12/07/2015
 CHECK BobYang DATE 12/07/2015



Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: 1.27mm Pin Header Dual Row Double Plastic Straight Type

DRAWING NO: PHCS08-XXD-0300-0500-0180-XXX

PRODUCT NO: PHCS08-XXD-0300-0500-0180-XXX

REV	DESCRIPTION	DATE
1	Increase packing method and material	2016/10/25