

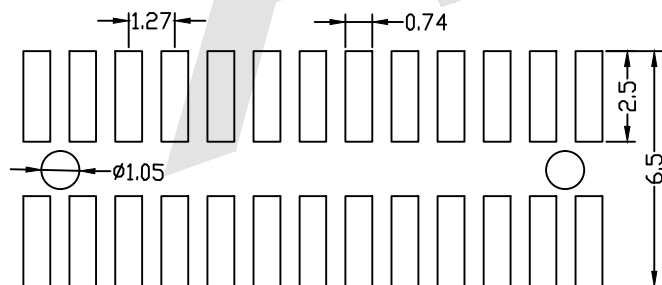



HSF

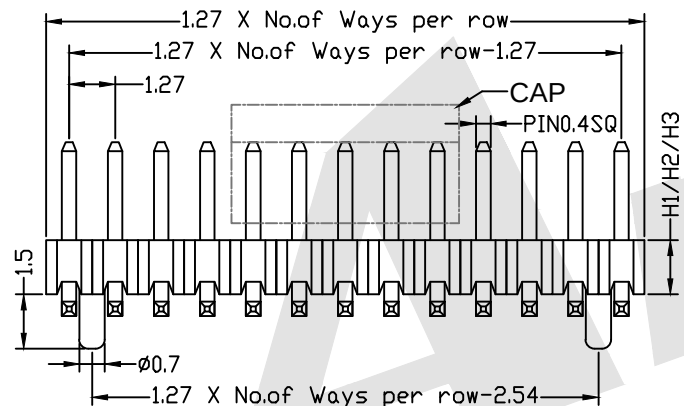


ROHS

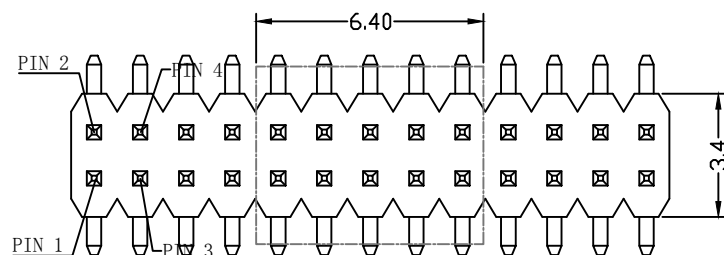

PCB LAYOUT



TYPE A



TYPE B

SPECIFICATION

Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65° C to +125° C
Contact Material:	Brass
Insulator Material:	PA6T, UL 94V-0 Black

Ordering Code:

PHCM11 - X - X - D - A-D-W - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ④ Series No:
② No. of Contacts
02 To 100
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type
D: Dual
⑤ Pin Length:
A: 0300=3.00mm
D: 0020=0.20mm
W: 0550=5.50mm
Please mark the desired length
in the A/D/W
- ⑥ Insulator Material
B:PA6T
C:LCP
E:PA9T
⑦ Packing
A:Tray B:Bag
T:Tube U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
⑧ Plastic High
H1:0.85mm H2:1.0mm
H3:1.5mm
⑨ With locating pegs option
A:Type A without pegs
B:Type B with pegs

Standard IE P/N :

PHCM11-10 - G0 -D - 0300-0020-0550 - B - B - H2 - A

A	D	W	Unless Otherwise specified tolerance
3.0	0.2	5.5	X. XX: ±0.20 X. X: ±0.25 X. XXX: ±0.15
Optional		SCALE: As Shown	UNIT: mm




ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

1.27mm Pin Header Dual Row SMT Type

DRAWING NO: PHCM11-XXD-0300-0020-0550 - XXXX

PRODUCT NO: PHCM11-XXD-0300-0020-0550 - XXXX



3rd ANGLE PROJECTION

Increase packing method and material

2016/10/25

REV

DESCRIPTION

DATE