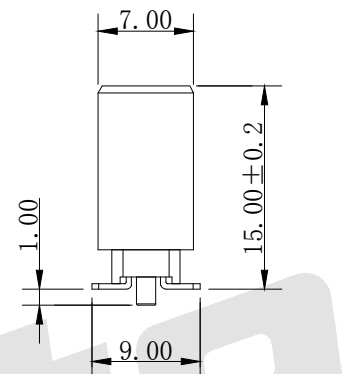
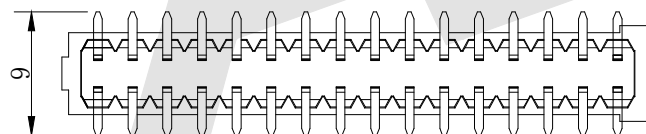
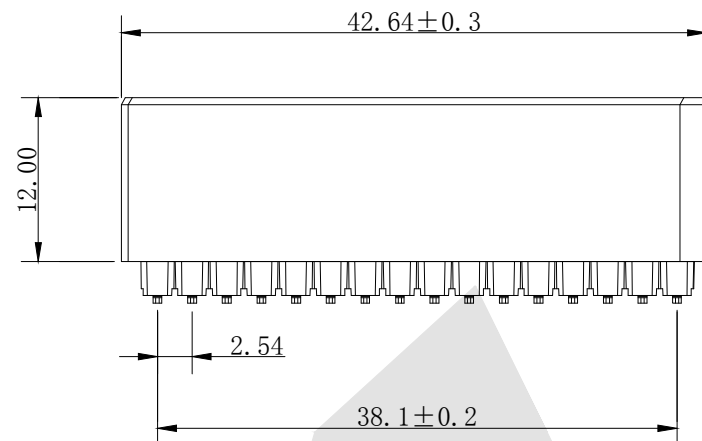


Mating Draw(Ref)

Specifications

Current rating:3.0A AC/DC
Contact resistance:20m ohm Max.
Insulation resistance:500M ohm Min.
Withstanding voltage:500VAC
Operating temperatre range:-40℃ to +80℃
Materials:
Housing:PA6T+30%G.F UL94V-0 Color:Black
Conact:Brass
Welding Temperature:260° C/10S

Ordering Code:

BB2.54 - F - X - X - X - X - 01
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series N0:
1.0mm Board to Board
connector

②M:Male F:Female

③ Mating Height:
H1:=18.7-18.9mm

④ NO. of Contacts:
32:2*16P=32Poles
- ⑤ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN:Tin

⑥ Packing
T:Tube A:Tray
B:Bag U:Tube+CAP
R:Tape & Reel
W:Tape & Reel+CAP

⑦ Serial Number:
01

NO.	SIZE	DOSE	UNIT
1	2.54 FEMALE HOUSING 2*16P	1	PCS
2	2.54 BTB SMT CONTACT L=17.0MM GOLD 1.5U"	32	PCS

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		

Unless Otherwise specified tolerance	
X. ±0.35	X.XX:±0.20
X.X:±0.25	X.XXX:±0.15
SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 18/09/2020
CHECK BobYang	DATE 18/09/2020
3rd ANGLE PROJECTION	

ANTENK ELECTRONICS CO.,LTD Http://www.antenk.com E-mail:sales@antenk.com	TITLE: 2.54mm 2*16P Male Board to Board Connector Mating H1=18.7-18.9MM L=17.0mm
	DRAWING NO: BB2.54F-H132G0B01 PRODUCT NO: BB2.54F-H132G0B01