
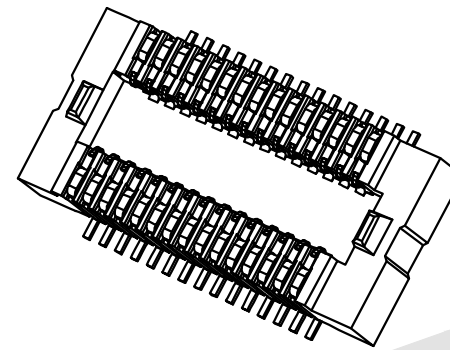


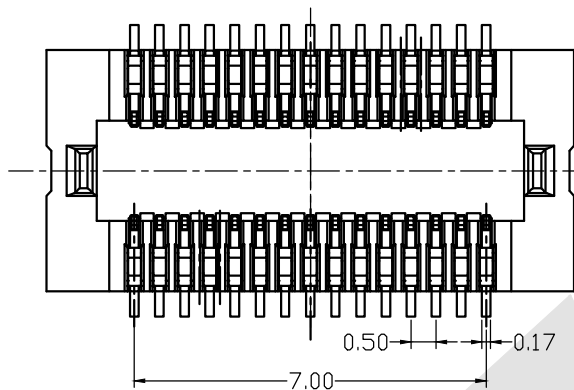




Electrical
Current Rating:0.5A
Voltage Rating:50V AC/DC
Contact Resistance:50milliohm Max
Insulation Resistance:100Megohm Min
Operation Temperature:-20°C to +105°C

Housing Material:PA9T+30%G.F(UL94V-0)
Contact Material:Phosphor Btonze
Contact plating:Au or Sn over Ni


Ordering Code:

BB0.5 - F - 2.0 - X - X - X - S - 01
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series NO:
0.5mm Board to Board connector
- ② M:Male F:Female
- ③ Mating Height:
2.0=2.0mm
- ④ NO. of contacts:
30:30poles
- ⑤ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ⑥ Packing
T:Tube A:Tray
B:Bag U:Tube+CAP
R:tape&Reel
W:tape&Reel+CAP
- ⑦ S:without locating
pegs Spring type
- ⑧ serial number: 01

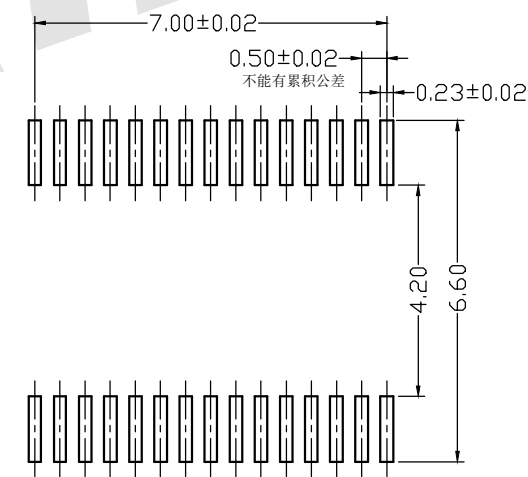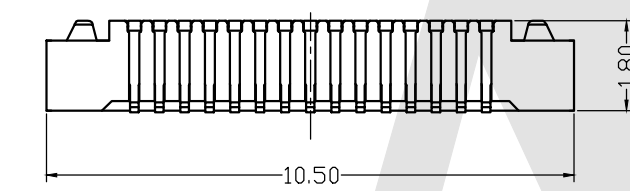

PCB LAYOUT

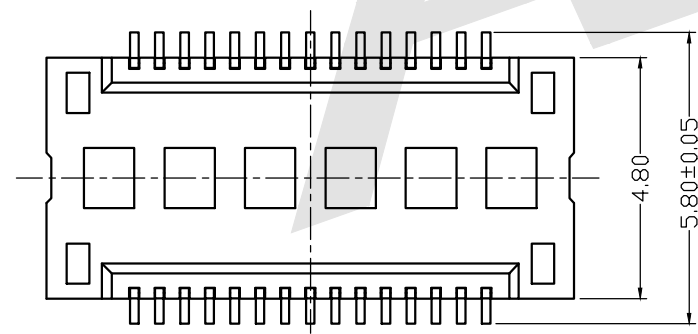

Unless Otherwise specified tolerance	
X. ±0.35	X.XX: ±0.20
X.X: ±0.25	X.XXX: ±0.15
SCALE: As Shown	UNIT: mm
DRAW Mo Guo Xuan	DATE 09/11/2018
CHECK BobYang	DATE 09/11/2018
 3rd ANGLE PROJECTION	

 ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 0.5mm Board to Board connector, 30PIN Female without locating pegs Spring type, mating Height=2.0mm	
DRAWING NO:	BB0.5F-2.0XXXS01
PRODUCT NO:	BB0.5F-2.0XXXS01

REV	DESCRIPTION	DATE