

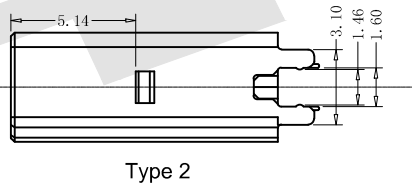
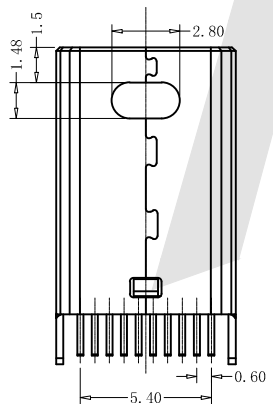

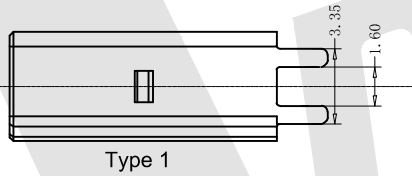



HSF



ROHS

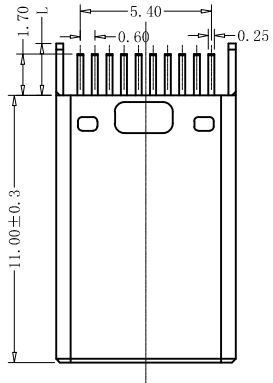

Specifications

1. Electrics:

- 1.1 Rated Voltage:40VAC MAX;
- 1.2 Rated Current:0.5A
- 1.3 Contact Resistance:30mΩ Max.
- 1.4 Insulation Resistance:100MΩ Min.
- 1.5 Withstand Voltage:300VAC;

2. Mechanical:

- 2.1 Insertion Force:4.5Kgf Max.
- 2.2 Withdrawal Force:1.0~4.0Kgf.

3. Environmental:

- 3.1 Temperature Range:-40℃~+85℃

4. materials:

- 4.1 Terminal:BRASS, Selective Gold Plating and Tin Plating;
- 4.2 Housing:LCP Black
- 4.3 Shell:SPCC or Brass, Tin Plating

5. Packing:Tray

Ordering Code:

MDP - M - X - X - X - 06
 ① ② ③ ④ ⑤ ⑥

① Series No:

② Male/female:
M:male

③ Contact Plating:
1: Selective 1u"
2: Selective 3u"
3: Selective 5u"
4: Selective 15u"
5: Selective 30u"
6: All Gold

④ Shell Plating:
1:Nickel Plated
2:Tin-Nickel Plated
3:Gold Plated

⑤ Type of straddle and Length of L:
1:Type 1,L=2.15
2:Type 2,L=1.5

⑥ series number:
06

Unless Otherwise specified tolerance
 X. XX: ±0.20
 X. X: ±0.25 X. XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW ZLA DATE 24/03/2022

CHECK BobYang DATE 24/03/2022



Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: Mini Display Port Plug (straddle 1.6mm type)

DRAWING NO: MDP-M-X-X-X-06

PRODUCT NO: MDP-M-X-X-X-06

REV DESCRIPTION

DATE

1 2 3 4 5 6 7 8