
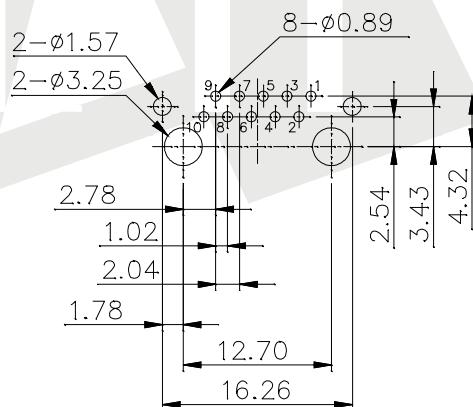


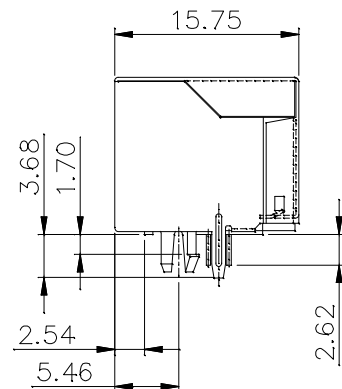


HSF



P.C.B LAYOUT/TOP VIEW

MATERIALS:

PLASTIC HOUSING:HIGH TRMP.THERMOPLASTIC
FLAMMBILLTY RATING UL

94V-0.

CONTATTS:PHOSPHOR BRONZE

PLATING:GOLD PLATING OVER NICKEL IN
CONTACT.

TIN PLATING OVER NICKEL IN SOLDER
AREA.

SHIELD:BRASS PLATING NICKEL ALLOY.

REVRONMENTAL:

1. STORAGE : -40° C TO 80° C
2. OPERATION : 0° C TO 70° C

Order code:

ATRJ5622 - 10P - 10C - X - C - D - B

① ② ③ ④ ⑤ ⑥ ⑦

- ① SERIES NO:
- ② NUMBER OF POSITIONS
(10P, 8P, 6P, 4P)
- ③ NUMBER OF CONTACTS
(10C, 8C, 6C, 4C)
- ④ Contact Plating
G0:Gold flash
G1: 3U" Gold
G2: 5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
SN:Tin
- ⑤ Shield
A:W/O Shield
B:Half Shield
C:Shield W/Eml
D:Shield W/O Eml
- ⑥ Ports
A:1X1P G:2X1P
B:1X2P H:2X2P
C:1X4P I:2X3P
D:1X5P J:2X4P
E:1X6P K:2X6P
F:1X8P L:2X8P
- ⑦ LED STYLE:
A:W/O LED
B:LEFT YELLOW/RIGHT GREEN
C:LEFT GREEN/RIGHT YELLOW
D:LEFT RED/RIGHT GREEN
E:LEFT GREEN/RIGHT RED
F:LEFT YELLOW/RIGHT YELLOW
G:LEFT GREEN/RIGHT GREEN

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:
As Shown UNIT:
mm
DRAW
Wu Feng Rong DATE
30/07/2019
CHECK
BobYang DATE
30/07/2019



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
RJ45 Jack side entry, Full shielded

DRAWING NO: ATRJ5622-10P10C-X-C-D-X

PRODUCT NO: ATRJ5622-10P10C-X-C-D-X

REV

DESCRIPTION

DATE