



SPECIFICATION

Current Rating: 3.0 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

PC104E08 - 10 - X - D - X - X - X
 (1) (2) (3) (4) (5) (6) (7)

① Series No:

② No.of Contacts
10

③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin

④ Connector Type
D: Dual

⑤ Plastic High:
H: 8.9

Please mark the desired length in the H

⑥ Insulator Material

A:PBT
 B:PA6T
 C:LCP
 D:PA46
 E:PA9T

⑦ Packing

A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW GONG FENG DATE 11/02/2021

CHECK BobYang DATE 11/02/2021








Antenk ANTEK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE: 2.54 mm Female Header +Add Plastic
 2x5P 45 Degree Type H=8.9

DRAWING NO: PC104E08-10XDXXX

PRODUCT NO: PC104E08-10XDXXX

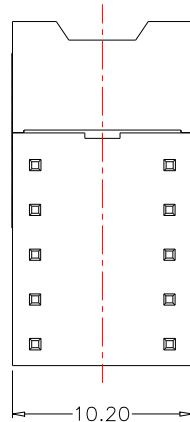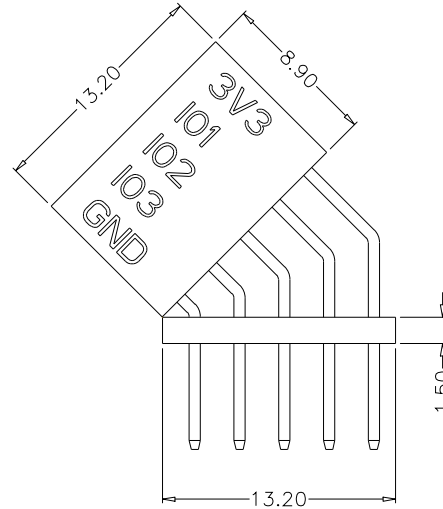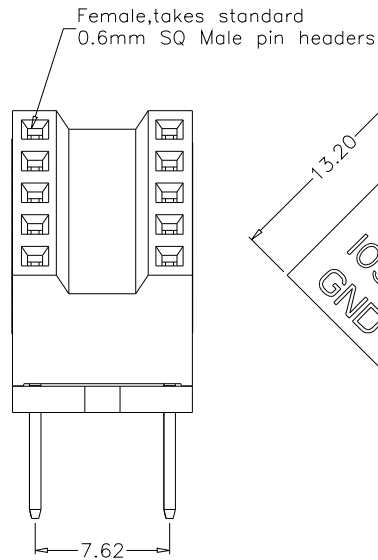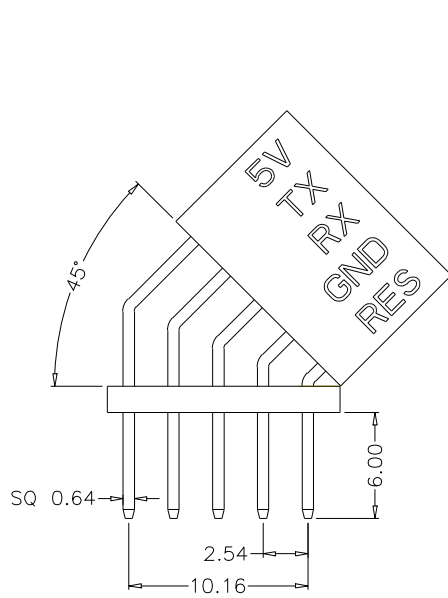

REV	DESCRIPTION	DATE