

HSF






SPECIFICATIONS



- Voltage rating: 250V AC/DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40°C~+105°C

WAFER

- Part NO: AW2008V-S-2xNP
- Material: Pin: Brass/Tin over Nickel
Insulator: Nylon 6T, UL94V-0
- Mates with: AH2008 Dual Row series Housing
- Color: Ivory

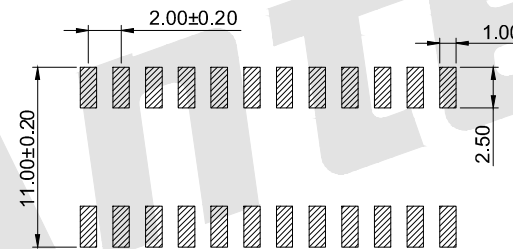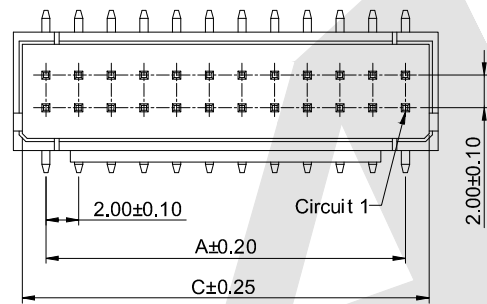

P.C.B LAYOUT

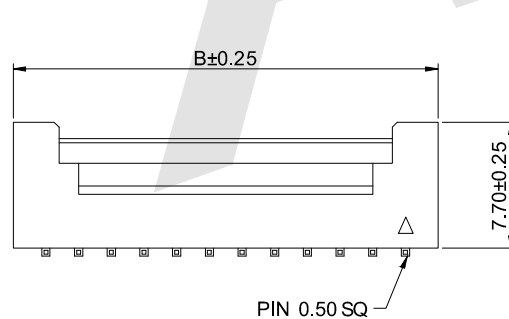

Ordering Information & Dimensions:

Poles	Part No.	Dimensions (mm)		
		A	B	C
6	AW2008V-S-2x03P	4.00	8.00	6.80
8	AW2008V-S-2x04P	6.00	10.00	8.80
10	AW2008V-S-2x05P	8.00	12.00	10.80
12	AW2008V-S-2x06P	10.00	14.00	12.80
14	AW2008V-S-2x07P	12.00	16.00	14.80
16	AW2008V-S-2x08P	14.00	18.00	16.80
18	AW2008V-S-2x09P	16.00	20.00	18.80
20	AW2008V-S-2x10P	18.00	22.00	20.80
22	AW2008V-S-2x11P	20.00	24.00	22.80
24	AW2008V-S-2x12P	22.00	26.00	24.80
26	AW2008V-S-2x13P	24.00	28.00	26.80
28	AW2008V-S-2x14P	26.00	30.00	28.80
30	AW2008V-S-2x15P	28.00	32.00	30.80
32	AW2008V-S-2x16P	30.00	34.00	32.80
40	AW2008V-S-2x20P	38.00	42.00	40.80

Unit: mm


Unless otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15



ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 10/22/2017
CHECK Bob Yang	DATE 10/22/2017

TITLE: 2.00mm pitch 180° Dual Row Wafer-SMT TYPE Connector Series



DRAWING NO: AW2008V-S-2xNP
 PRODUCT NO: AW2008V-S-2xNP

REV	DESCRIPTION	DATE