HSF Pb RoHS

SPECIFICATION

Current Rating:	1.0Amp
Insulation Resistance:	1000MΩ min
Contact Resistance:	20mΩ max
Withstand Voltage:	500V AC/DC
Operating Temperature:	-40° C to +105° C
Contact Material:	Brass
Contact Plating:	Au or Sn Over Ni
Insulator Material:	PBT+30%GF UL 94V-0



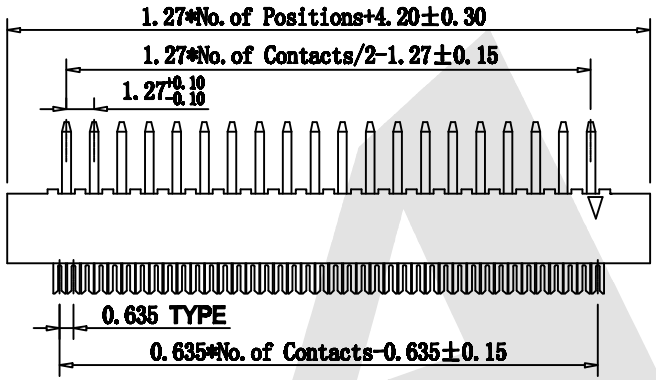



A:Type1



B:Type2

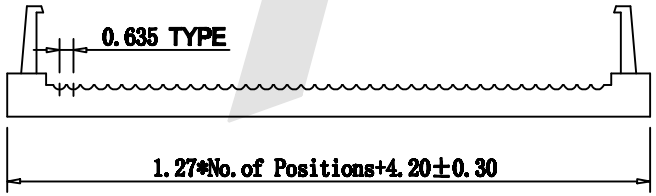



Ordering Code:

FDBS01 - X - X - X - X - X

① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts

10	14	16
18	20	24
26	30	34
40	44	50
60	80	

③ Contact Plating

G0: Gold flash	S0: Gold flash/Ni
G1: 3u″ Gold	S1: 3u″ Gold/Ni
G2: 5u″ Gold	S2: 5u″ Gold/Ni
G3: 10u″ Gold	S3: 10u″ Gold/Ni
G4: 15u″ Gold	S4: 15u″ Gold/Ni
G5: 30u″ Gold	S5: 30u″ Gold/Ni
SN: Tin	

④ Color Insulator
B:Black
G:Grey

⑤ Packing
A:Tray
B:Bag
C:Tube
D:Tape Reel

⑥
A:Type1
B:Type2

REV	DESCRIPTION	DATE

Unless Otherwise specified tolerance
X.±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown	UNIT: mm
DRAW Gong Feng	DATE 08/11/2017
CHECK BobYang	DATE 08/11/2017

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 1.27*2.54mm DIP Plug Connector (Terminated Height 5.1)

DRAWING NO: FDBS01-XXXXX

PRODUCT NO: FDBS01-XXXXX

Antenk