

HSF



ROHS





SPECIFICATION

Current Rating: 7 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: LCP,UL 94V-0 Black

Ordering Code:

PHFS01 - X - X - S - A-B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
01 To 40
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN: Tin
- ④ Connector Type
S: Single
- ⑤ Pin Length:
 A: 1080=10.80mm
 B: 0350=3.50mm
 Please mark the desired length in the A/B
- ⑥ Insulator Material
 B: PA6T
 C: LCP
 E: PA9T
- ⑦ Packing:
 A: Tray
 B: Bag
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP

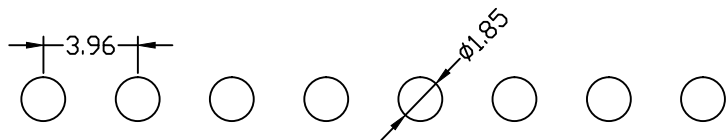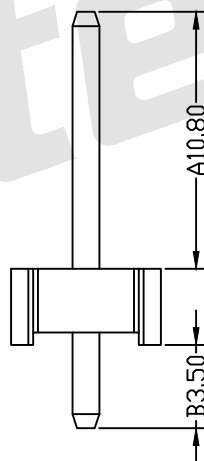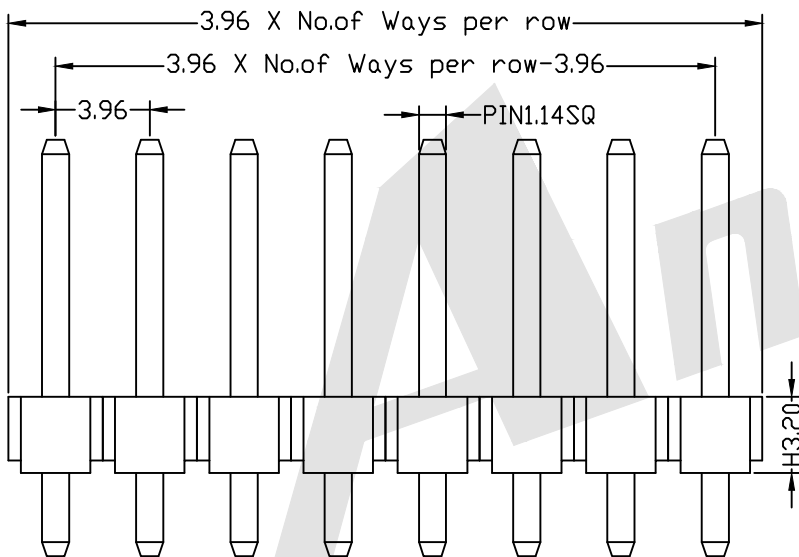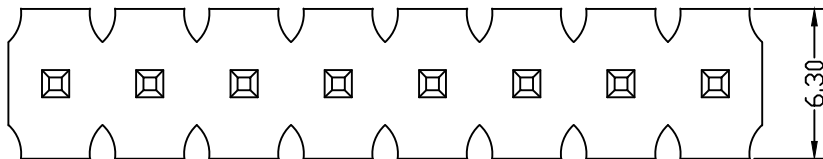

PCB LAYOUT

Standard IE P/N :

PHFS01-10-G0-S-1080-0350-C-B

A	B	Unless Otherwise specified tolerance	
10.8	3.5	X. ±0.35	X.XX: ±0.20
		X.X: ±0.25	X.XXX: ±0.15
Optional	SCALE: As Shown	UNIT: mm	

Antenk ANTEK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
3.96mm Pin Header Single Row Straight Type

REV	Increase packing method and material	2016/10/25	
	DESCRIPTION	DATE	

DRAWING NO: PHFS01-XXS-1080-0350-XX
 PRODUCT NO: PHFS01-XXS-1080-0350-XX