



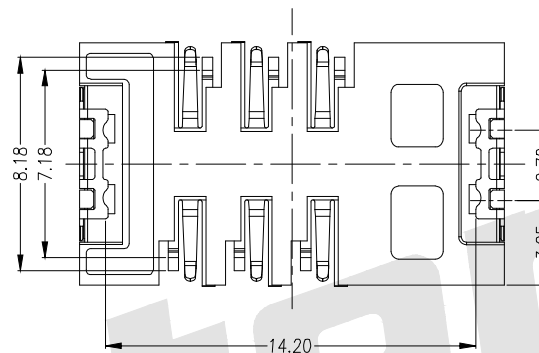
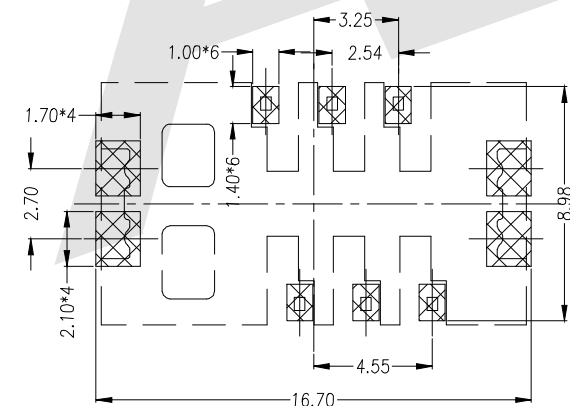


HSF

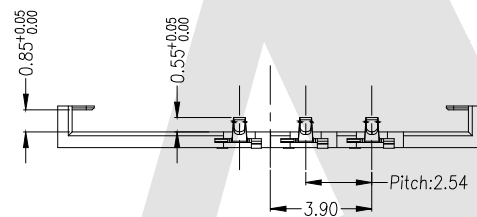

ROHS

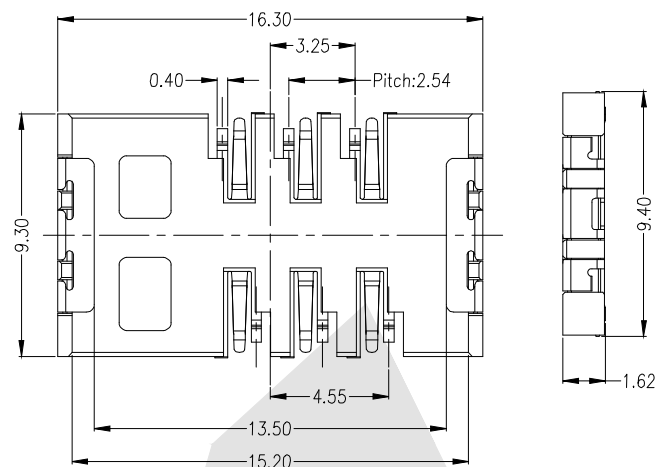

Specification

Electrical characteristics:

Contact current rating:0.5 A

Dielectric withstanding voltage:AC 500V r.m.s

Insulation resistance:500mΩ minimum

Contact resistance:30 mΩ maximum

Environmental:

Operating Temperature:-55℃~+85℃

Environmental:

Mating Cycles:5000 Insertions

Material:

Insulator:HI-temp plastic UL-94V-0 RATED

Contact:Copper alloy(t=0.15mm)

Shell:stainless steel (t=0.15mm)

Ordering Code:

PART NUMBER:

ATK - SIM 6 1.6 A A

SERIES NUMBER

Packing

A:Tray

T:Tube

R:Tape&Reel

1.6=1.60mm

6=6Pin

ATK- COMPANY NAME

Unless Otherwise specified tolerance


X. ±0.35 X.XX: ±0.20

X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW Wu Sai DATE 22/03/2018

CHECK BobYang DATE 22/03/2018



ANTENK ELECTRONICS CO.,LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

6P SIM Card Connector 1.6H Derangement

DRAWING NO:

ATK-SIM61.6AA

PRODUCT NO:

ATK-SIM61.6AA

REV

DESCRIPTION

DATE