

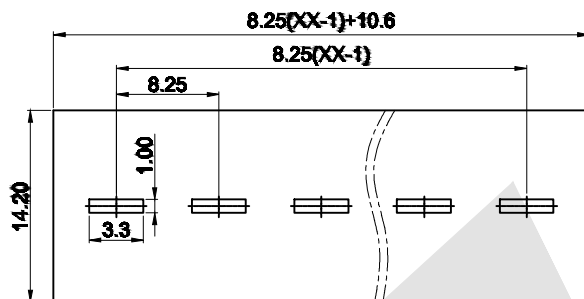
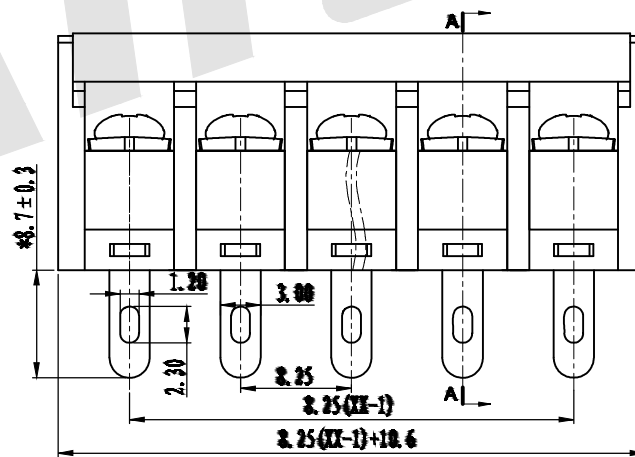


HSF

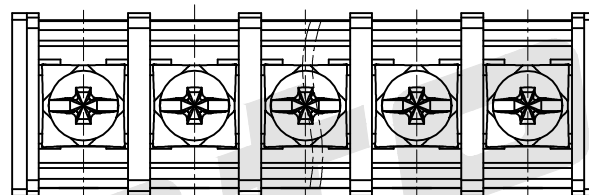


**P.C.B. LAYOUT**

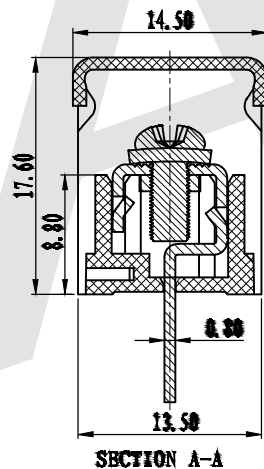

**SPECIFICATION**

Standard (参考标准): UL IEC  
 Voltage Rating (额定电压): 300V 450V  
 Current Rating (额定电流): 15A 17.5A  
 Wire range (使用线径): 22-14AWG 1.5mm<sup>2</sup>  
 Withstanding voltage (耐电压): AC2000V/1Min  
 Insulation resistance (绝缘电阻): 500MΩ/DC500V  
 Temp Rang (温度范围): -40° C ~ +105° C  
 Max Torque (最大锁紧力矩): 0.5Nm (4.5lb. in)  
 Housing (塑件): PA66, UL94V-0  
 Screw (螺丝): Steel, M3.0 Ni-Plated  
 Terminal (端子): Brass, 0.8t, Tin Plated  
 Pitch (间距): 8.25mm  
 Poles (极数): 2P-26P

**Ordering Code:**

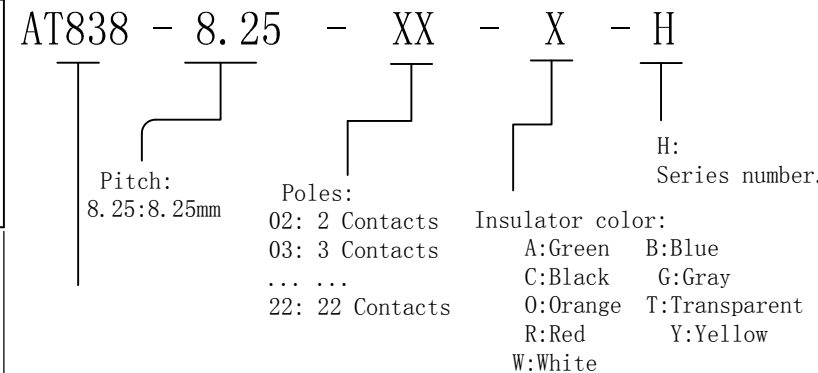


Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

**Antenk**® ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Wu Sai	DATE 22/03/2018
CHECK BobYang	DATE 22/03/2018

TITLE:  
Barrier Terminal Block Pitch:8.25mm



DRAWING NO: AT838-8.25XXX-H  
 PRODUCT NO: AT838-8.25XXX-H

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		