




HSF

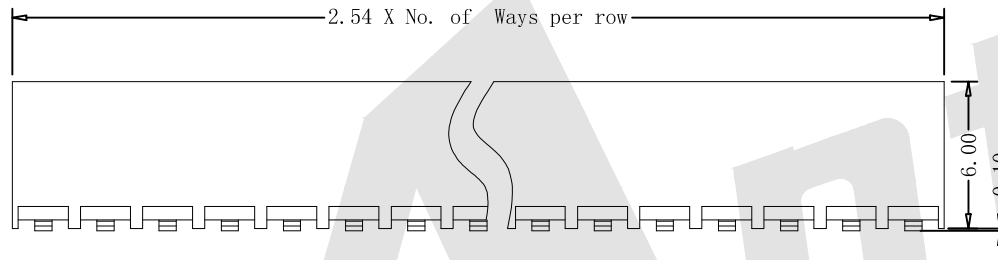

ROHS

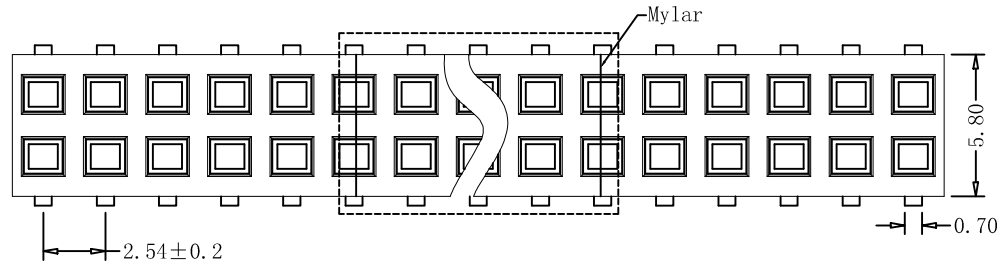

Specification:

- 1. Material:
 - 1-1. Housing: PA9T-GF33, UL94 V-0 Black
 - 1-2. Terminal: C5191H T=0.20mm
- 2. Plating:
 - Bright tin: 80u"-200u" Over Nickel: 50u"-100u"
- 3. Lifecycle: 100次;
- 4. Electric:
 - 4-1. Rate Current: 2A AC, DC;
 - 4-2. Rate Voltage: 12V AC, DC;
 - 4-3. Contact Resistance: 20 mΩ Max;
 - 4-4. Insulation Resistance: 100 MΩ Min;
 - 5. Temper Range: -40℃ ~ +105℃ ;

Ordering Code:

FHEM21 - X - X - D - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 02 To 80
- ③ Contact Plating:
 - G0: Gold flash S0: Selective
 - G1: 3U" Gold S1: Selective 3u"
 - G2: 5u" Gold S2: Selective 5u"
 - G3: 10u" Gold S3: Selective 10u"
 - G4: 15u" Gold S4: Selective 15u"
 - G5: 30u" Gold S5: Selective 30u"
 - SN: Tin
- ④ Connector Type: D: Dual
- ⑤ Plastic High: H: 6.0
Please mark the desired length in the H
- ⑥ Insulator Material:
 - A: PBT
 - B: PA6T
 - C: LCP
 - D: PA46
 - E: PA9T
- ⑦ Packing:
 - A: Tray
 - B: Bag
 - T: Tube
 - U: Tube+CAP
 - R: Tape&Reel
 - W: Tape&Reel+CAP
 - F: Tape&Reel+Film

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15


SCALE: As Shown UNIT: mm
 DRAW ZLA DATE 04/05/2022
 CHECK BobYang DATE 04/05/2022

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail: sales@antenk.com

TITLE: 2.54mm Female Header Dual Row SMT Type With Bump

DRAWING NO: FHEM21-XXDXXX

PRODUCT NO: FHEM21-XXDXXX



REV	DESCRIPTION	DATE
1		