

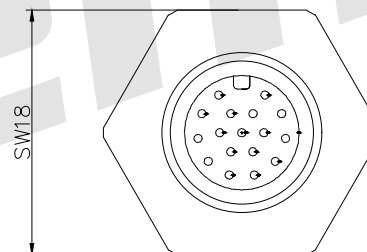
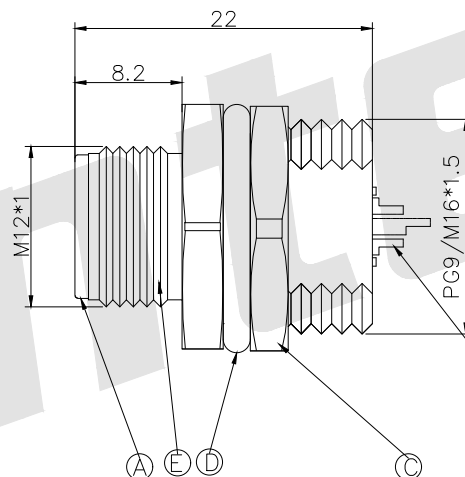


HSF



RoHS

A-CODE	9 Pin	10 Pin	11 Pin	12 Pin	13 Pin	14 Pin	15 Pin	16 Pin	17 Pin

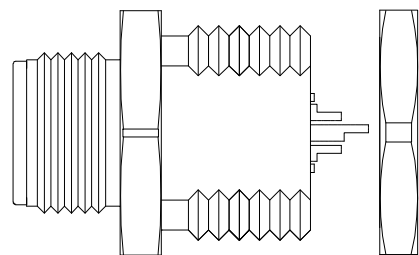



Order Code:

M1202 - A - XP - M - 011
① ② ③ ④ ⑤

- ① Type of M series: M1202
② Code Option: A
③ NO. of PINS: 09~17
④ Gender option: Male
⑤ Series number: 011

Recommended Panel

Cut-out M16




Engagement force	≤30N	Rated voltage	30V DC
Isengagement force	≥5N	Rated current	1.5A
echanical lifespan	≥500	Insulation resistance	≥1000 MΩ
IP rating	IP67/IP68	Contace resistance	≤10mΩ
Flammability	UL94 v-0	Operation Temperature	-40 T0+105℃

E	Over Mold	1	NICKL PLATED BRASS
D	O RING	1	SILIGONE RED
C	NUT	1	NICKL PLATED BRASS
B	male PIN	/	GOLD PLATED BRASS
A	BODY	1	PA66+GF BLACK
Item	PART NAME	QTY	MATERIAL /FINISH

Unless Otherwise specified tolerance

X.±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
DRAW ZLA DATE 24/05/2022
CHECK BobYang DATE 24/05/2022



Antenk® ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: M12 9~17P Male Waterproof Wire Side
Lock Back Panel PG9 M16 SW18T

DRAWING NO: M1202-A-XP-M-011

PRODUCT NO: M1202-A-XP-M-011

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		