


HSF



ROHS

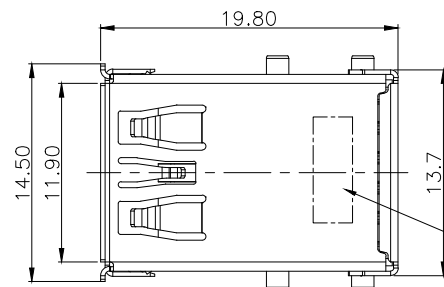

DATE CODE
Year+Month+Day
Smple:180920
18Year09Month20Day

NOTES:

1. MATERIAL:

- 1.1 HOUSING:HIGH TEMPERATURE THERAL
PLASTIC, UL94V-0 (SEE TABLE)
1.2 TERMINAL: 5PIN CONTACT BRASS.
4PIN CONTACT PHOSPHOR BRONZE

1.3 SHELL:STAINLESS STEEL.

2. PLATING

2.1 TERMINAL:

UNDERPLATED:NICKEL UNDERPLATING OVER
ALL, GOLD PLATING ON CONTACT AREA,
THICKNESS:SEE TABLE
MATTE TIN 100 MICROINCH PLATING ON
SOLDER TAIL.

2.2 SHELL: NICKEL PLATING OVER ALL.

Ordering Code:

U3AFR10 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

① Series No:

② Shell Material:

B:Brass
S:stainless steel

③ Insulator Material:

P:PBT+30%GF
L:LCP

④ Contact Material:

B:Brass
P:phosphor copper

⑤ Contact Plating

G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold

⑥ Packing

A:Tray
B:Bag
C:Tube
D:Tape & Reel


Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:

As Shown

UNIT:

mm

DRAW
Wu Feng RongDATE
09/06/2020CHECK
BobYangDATE
09/06/2020

ANTENK ELECTRONICS CO.,LTD





Http://www.antenk.com

E-mail:sales@antenk.com


TITLE: USB 3.0 AF Double Layer 90 Degree Dip C
(Bent Foot 3.5, Foot Length 3.0)

DRAWING NO: U3AFR10-XXXXX

PRODUCT NO: U3AFR10-XXXXX

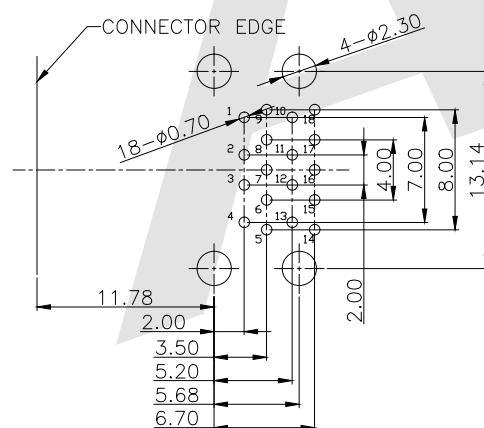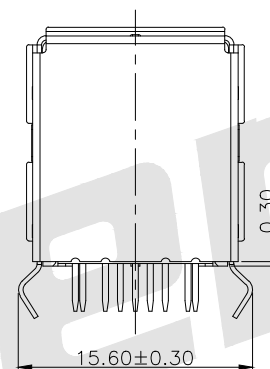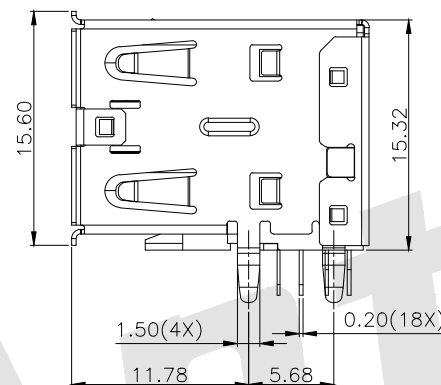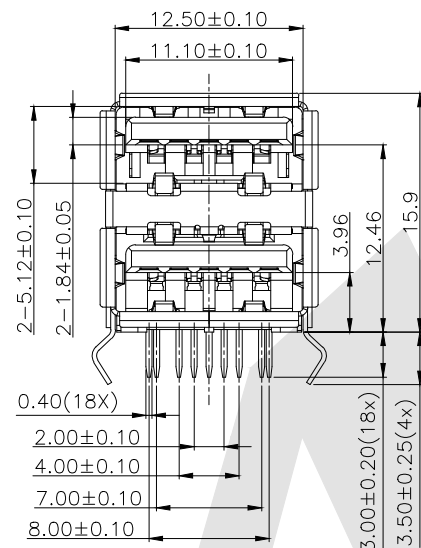

P.C.B. LAYOUT (COMPONENT SIDE)
DEFAULT TOLERANCE: ± 0.05

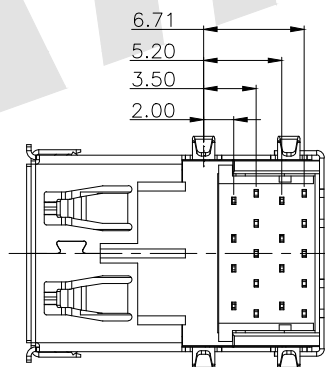

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8